

SUPER MARKET

TRACK LINEAR LIGHT -
ADJUSTABLE



220MM | 400MM | 600MM | 1170MM




Specification

Input Voltage: AC220-240V @50/60Hz (Standard)
 Material: Aluminum + PC
 Light Source: SMD3030
 Driver: LIFUD
 CCT: 3000K / 4000K / 6500K
 CRI: 90RA
 Optics: Lens + Diffuser
 Beam Angle: 36° + 36° / 36° + 120° + 36°

Installation: Suspension, Surface Mounted, Bridge Mounted, Track Mounted
 Track Type: 2/3 Wire 1 Phase (Standard)
 IP Rating: IP20
 Finish: Black
 Operating Temperature: -40°C - 50°C
 Lifespan: 50,000 Hrs
 Warranty: 5 Years

Model No.	Power	For 3 Linears	Size	Qty/CTN	G.W.	Measurement
LANCER III-40W	40W	15W+10W+15W	L220*W139.5*H53	10pcs	7.7kg	67x28x25.5cm
LANCER III-80W	80W	30W+20W+30W	L400*W139.5*H53	10pcs	13.4kg	67x28x44cm
LANCER III-120W	120W	45W+30W+45W	L600*W139.5*H53	10pcs	20.1kg	67x64x28cm
LANCER III-200W	200W	90W+20W+90W	L1170*W139.5*H53	5pcs	13.4kg	124x67x15cm
LANCER I-20W	20W	/	L220*W50*H72	40pcs	16.4kg	52x49x37cm
LANCER I-40W	40W	/	L400*W50*H72	40pcs	16.4kg	44x42x37cm
LANCER I-60W	60W	/	L600*W50*H72	20pcs	24.6kg	65.5x42x37cm
LANCER I-100W	100W	/	L1170*W50*H72	20pcs	32.8kg	124x42x37cm


Features

	<p>Easy Use</p> <p>120° adjustable</p> <p>Quick installation as 3-5 seconds</p>
<p>High Quality Material</p> <p>OSRAM 3030 chips and Lifud driver, the special rectangle illuminance for goods in a certain area.</p>	
	<p>Customized</p> <p>Length can be customized, more functions such as DALI Dimmable is possible.</p>

Installation



Track Mounted

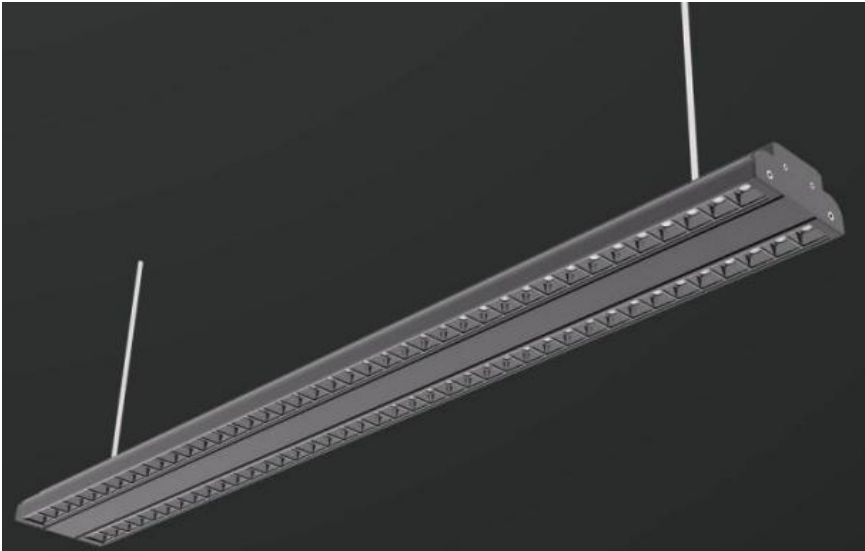

Suspension



Bridge Mounted

Application

