

ASIMO



A Smart More Lightinig Solution

Product Catalog



WhatsApp



WeChat

ASIMO LIGHTING CO.,LTD

📍 Add: No.156 Chang'an Road, Zhongshan, China

✉ Jack@asolite.com

🌐 www.asolite.com

PRODUCT CATALOGUE

ASIMO LIGHTING CO.,LTD



ASIMO Lighting, established in 2012 in Zhongshan, China, is a professional manufacturer of lighting fixtures. The company operates two production bases—the Guzhen factory and the Xiaolan factory—spanning a total of approximately 7,000 square meters.

Equipped with more than 10 production lines and a workforce of over 100 employees, ASIMO Lighting specializes in producing a wide range of high-quality lighting products at low costs with reasonable pricing.

With a commitment to innovation in LED technology, ASIMO Lighting serves over 200 customers across 80 countries. The company prides itself on delivering exceptional product quality and excellent service to its customers.



ASIMO LIGHTING CO.,LTD

ENTERPRISE QUALIFICATION CERTIFICATE




LED

Basic knowledge

Definition of led life

incandescent bulb, fluorescent lamp can be easily broken caused by electric shock, while led lamp can still work even after 40000h, only luminous decays as time goes.

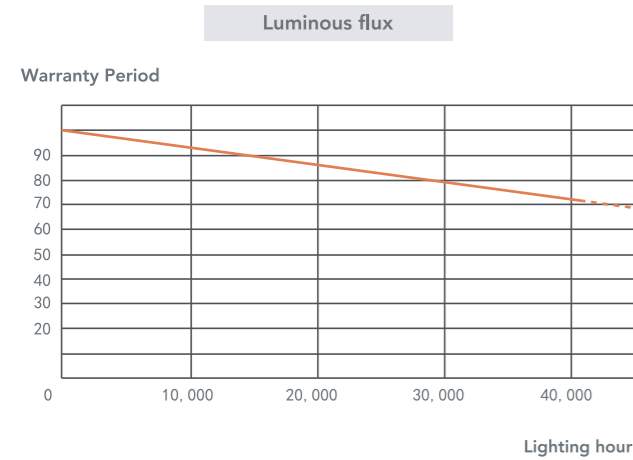

Used for Close Range illumination

Non-ultraviolet radiation and infrared rays, alleviate the fades and degradation of the subject.

Lower heated when shines closely. Suitable for less heat-resisted product and commercial lighting.




Suitable for outdoor lighting




Anti-mosquito and insects

Led lamp is Non ultraviolet which cannot be sensed by mosquito and other inserts.


CRI / Ra 80+

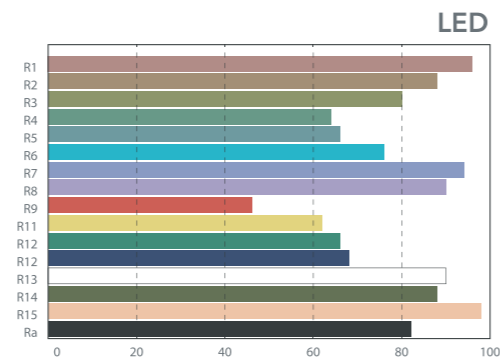

LED Ra Comparison



Ra 80+
Our LED




Other LED


CONTENTS

<i>LED SMALL PANEL LIGHT</i>	<i>01</i>
<i>LED BIG PANEL LIGHT</i>	<i>07</i>
<i>LED DOWN LIGHT</i>	<i>11</i>
<i>LED TRACK LIGHT</i>	<i>22</i>
<i>LED SUPER MARKET TRACK LIGHT</i>	<i>27</i>
<i>LED OFFICE LINEAR LIGHT</i>	<i>29</i>
<i>M20 LED MAGNETIC TRACK LIGHT</i>	<i>31</i>
<i>LED TRI-PROOF LIGHT</i>	<i>43</i>
<i>LED UFO HIGH BAY LIGHT</i>	<i>45</i>
<i>LED FLOOD LIGHT</i>	<i>49</i>
<i>LED STREET LIGHT</i>	<i>53</i>
<i>LED SOLAR LIGHT</i>	<i>57</i>
<i>LED SPORTS STADIUM LIGHT</i>	<i>61</i>


SP SERIES Slim Panel Light




Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
SP-RR03	AC85-265V	3	130/140/150	Ø83*H14	65	40
SP-RR06	AC85-265V	6	330/370/390	Ø118*H14	100	40
SP-RR09	AC85-265V	9	500/555/585	Ø146*H14	130	30
SP-RR12	AC85-265V	12	715/795/840	Ø167*H14	150	30
SP-RR15	AC85-265V	15	955/1065/1125	Ø187*H14	170	20
SP-RR18	AC85-265V	18	1225/1365/1440	Ø221*H14	200	20
SP-RR24	AC85-265V	24	1735/1935/2040	Ø296*H14	275	10

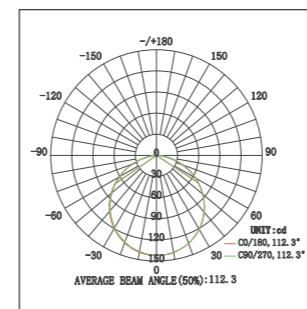


6W



9W

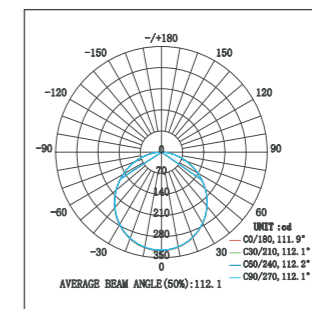


12W




Recessed


LED SMALL PANEL LIGHT

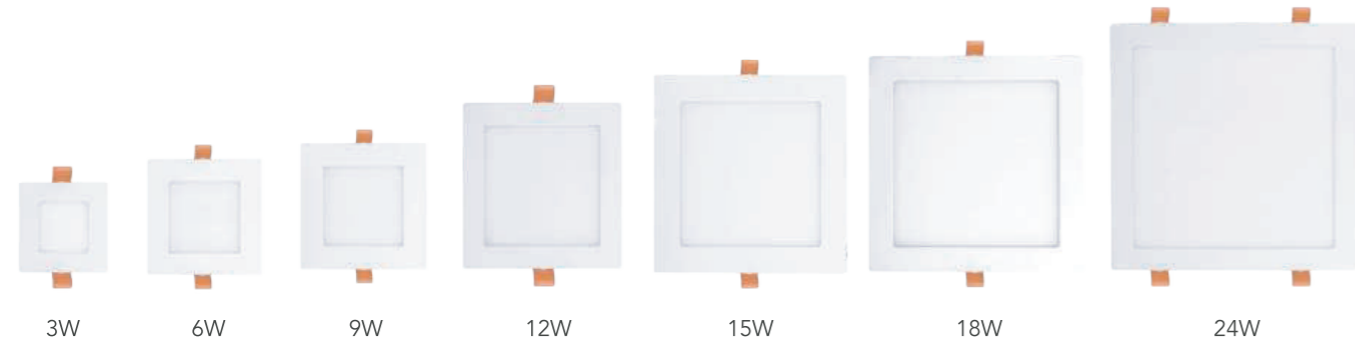


Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
SP-RS03	AC85-265V	3	130/140/150	83*83*H14	65*65	40
SP-RS06	AC85-265V	6	330/370/390	118*118*H14	100*100	40
SP-RS09	AC85-265V	9	500/555/585	146*146*H14	130*130	30
SP-RS12	AC85-265V	12	715/795/840	167*167*H14	150*150	30
SP-RS15	AC85-265V	15	955/1065/1125	187*187*H14	170*170	20
SP-RS18	AC85-265V	18	1225/1365/1440	221*221*H14	200*200	20
SP-RS24	AC85-265V	24	1735/1935/2040	296*296*H14	275*275	10

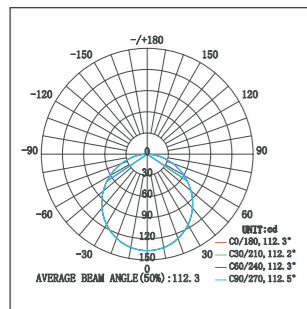


6W

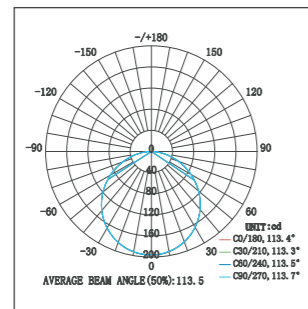


9W

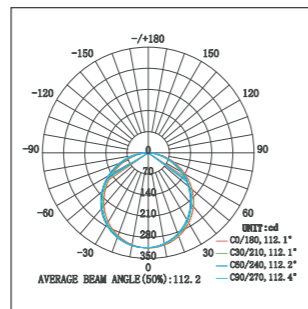


12W

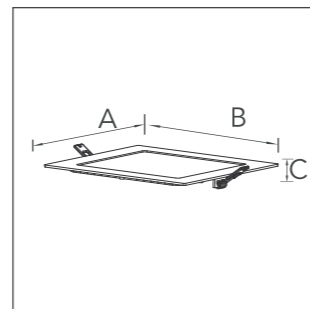


Recessed

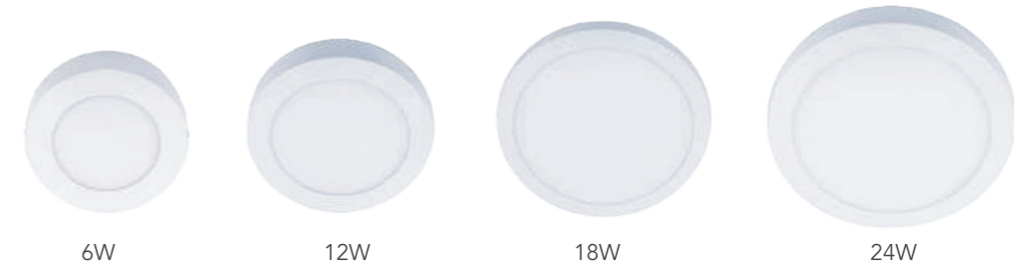

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Size (mm)	Packing QTY (pcs/CTN)
SP-MS06	AC85-265V	6	330/370/390	≥80	Ø116x32	40
SP-MS12	AC85-265V	12	715/798/840	≥80	Ø165x32	30
SP-MS18	AC85-265V	18	1225/1365/1440	≥80	Ø219x32	20
SP-MS24	AC85-265V	24	1735/1935/2040	≥80	Ø295x32	10

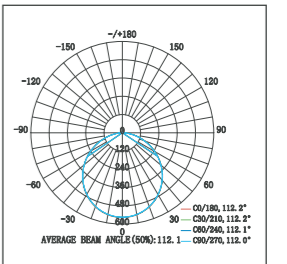


18W

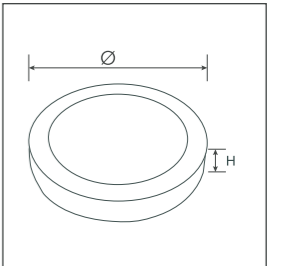


Surface mounted



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	CRI	Size (mm)	Packing QTY (pcs/CTN)
SP-MS06	AC85-265V	6	330/370/390	≥80	116x116x32	40
SP-MS12	AC85-265V	12	715/798/840	≥80	165x165x32	30
SP-MS18	AC85-265V	18	1225/1365/1440	≥80	219x219x32	20
SP-MS24	AC85-265V	24	1735/1935/2040	≥80	295x295x32	10

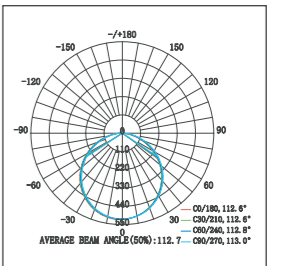


18W

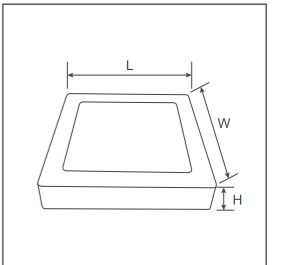


Surface mounted


3D SERIES Frameless Panel




Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
3D-RR10	AC85-265V	10	1000/1050/1100	Ø100x16	Ø50-70	100
3D-RR15	AC85-265V	15	1550/1600/1650	Ø120x16	Ø50-95	60
3D-RR22	AC85-265V	22	2200/2320/2420	Ø170x18	Ø50-140	40
3D-RR32	AC85-265V	32	3320/3420/3520	Ø220x18	Ø50-190	20

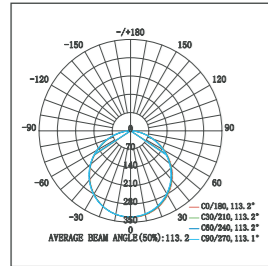


10W

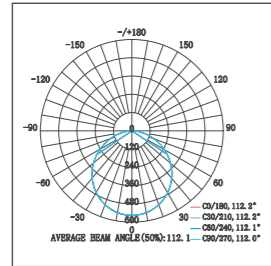


15W

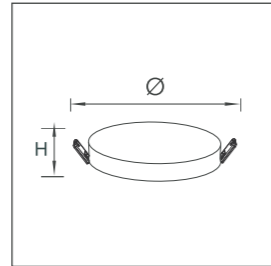


Recessed

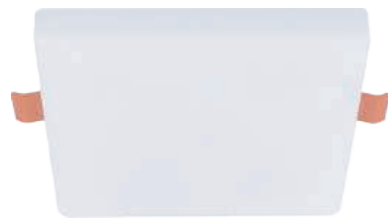


Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
3D-RS10	AC85-265V	10	1000/1050/1100	100x100x16	50-70	100
3D-RS15	AC85-265V	15	1550/1600/1650	120x120x16	50-95	60
3D-RS22	AC85-265V	22	2200/2320/2420	170x170x18	50-140	40
3D-RS32	AC85-265V	32	3320/3420/3520	220x220x18	50-190	20

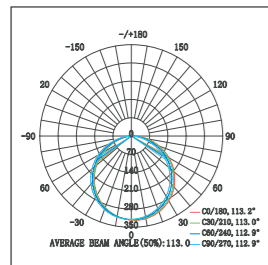

10W

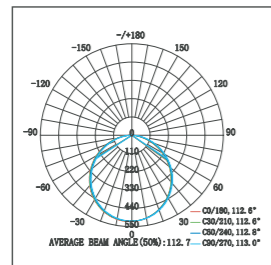


15W

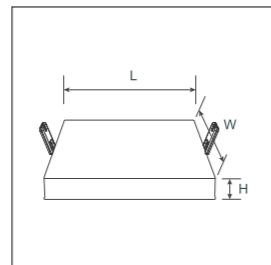


Recessed




Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
3D-MR18	AC85-265V	18	1500/1600/1700	Ø120x42	60
3D-MR24	AC85-265V	24	2040/2140/2240	Ø170x42	40
3D-MR36	AC85-265V	36	3200/3310/3420	Ø225x42	20
3D-MR48	AC85-265V	48	4700/4800/4900	Ø300x42	10

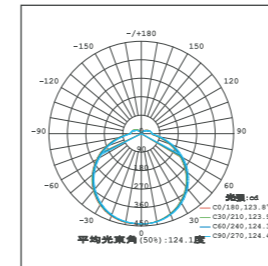

18W

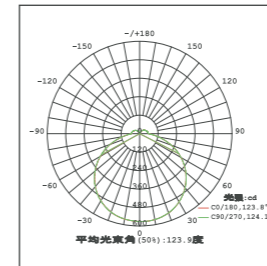


24W

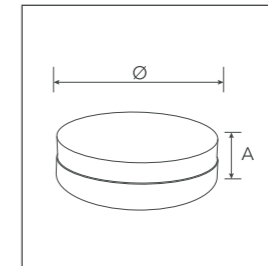


Surface mounted




Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
3D-MS18	AC85-265V	18	1500/1600/1700	120x120x42	60
3D-MS24	AC85-265V	24	2040/2140/2240	170x170x42	40
3D-MS36	AC85-265V	36	3200/3310/3420	225x225x42	20
3D-MS48	AC85-265V	48	4700/4800/4900	300x300x42	10

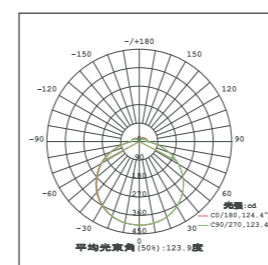

18W

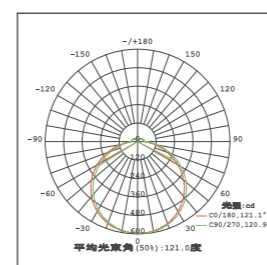

24W

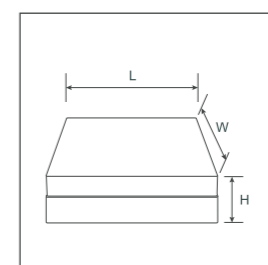

Surface mounted



LED BIG PANEL LIGHT


PLB SERIES - LED PANEL LIGHT (Side-Lite)




PLB-3030-18W

PLB-3060-36W

PLB-30120-48W

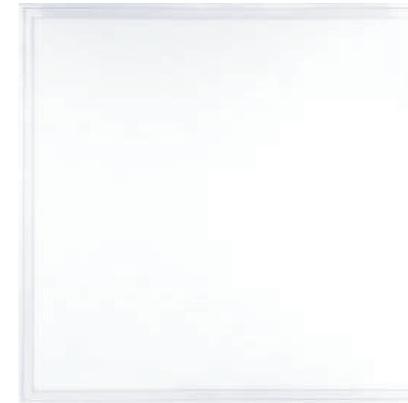


PLB-6060-48W

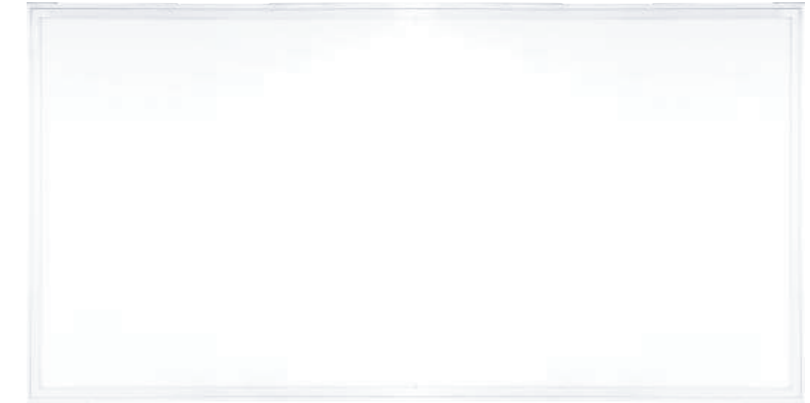


PLB-60120-72W



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
PLB-3030-18W	AC85-265V	18	1440/1620/1800	295x295	285x285	10
PLB-3060-36W	AC85-265V	36	2880/3240/3600	295x595	285x585	10
PLB-6060-48W	AC85-265V	48	3840/4320/4800	595x595	585x585	10
PLB-30120-48W	AC85-265V	48	3840/4320/4800	295x1195	285x1185	10
PLB-60120-72W	AC85-265V	72	5760/6480/7200	595x1195	585x1185	6

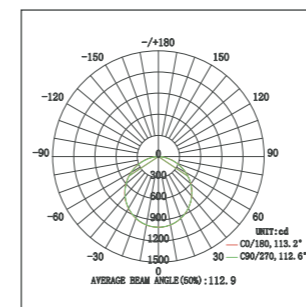

40W

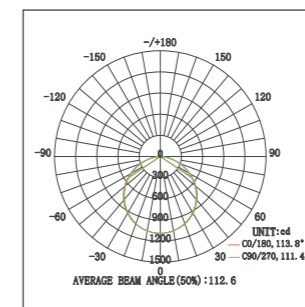


48W




DETAIL


PLA SERIES - LED PANEL LIGHT (Back-Lite)

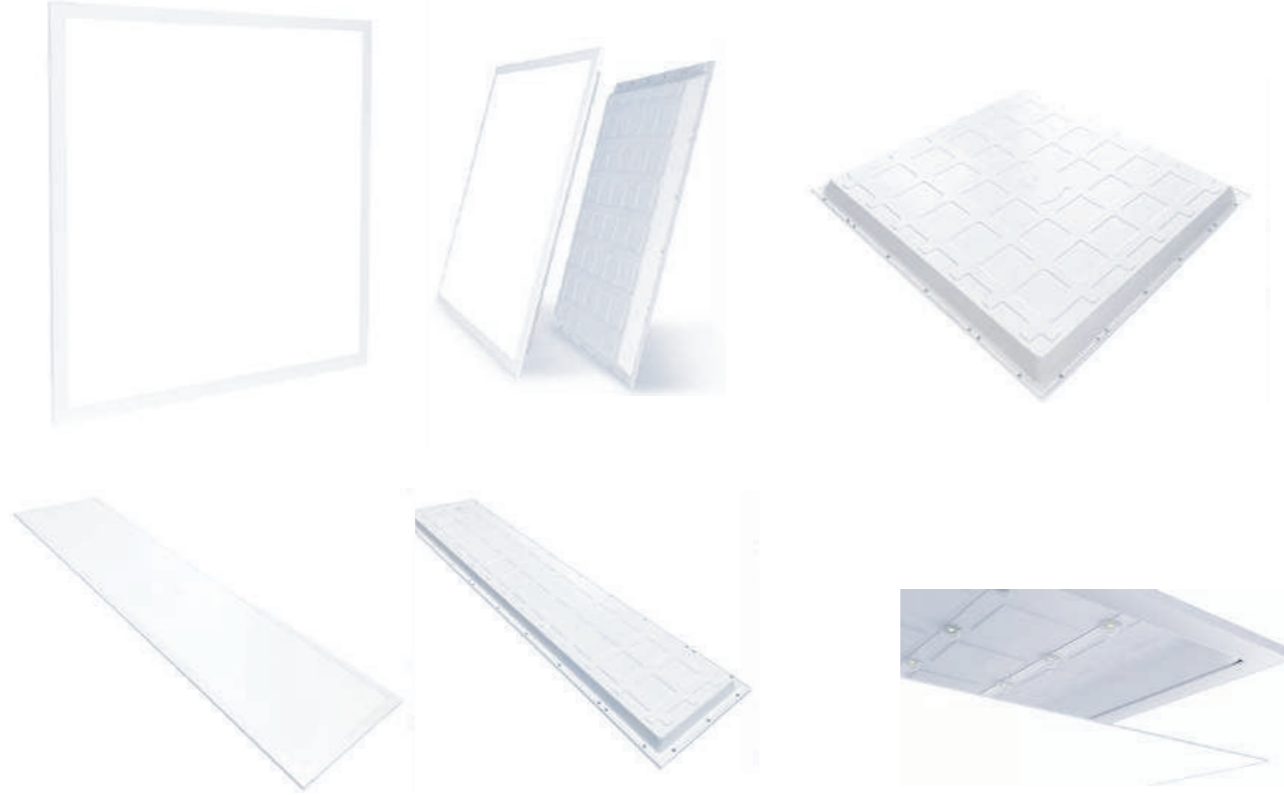


Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
PLA-3030-18W	AC85-265V	18	1530/1800/1980	295x295	285x285	10
PLA-3060-36W	AC85-265V	36	3060/3600/3960	295x595	285x585	10
PLA-6060-48W	AC85-265V	48	4080/4800/5280	595x595	585x585	10
PLA-30120-48W	AC85-265V	48	4080/4800/5280	295x1195	285x1185	10
PLA-60120-96W	AC85-265V	96	6120/7200/7920	595x1195	585x1185	6

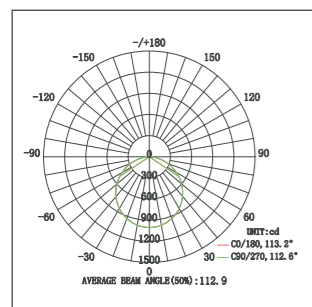

40W

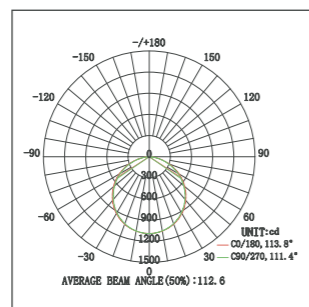

48W




PLC SERIES - LED PANEL LIGHT (Grille Type)

Grille (G) Diffuser & Grille (DG) Diffuser (D)



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
PLC-6060X-48W	AC85-265V	48	4080/4800/5280	595x595	585x585	10
PLC-6060X-60W	AC85-265V	60	5100/6000/6600	595x595	585x585	10
PLC-6060X-96W	AC85-265V	96	8160/9600/10560	595x595	585x585	10

X=D (Diffuser Type) or G (Grille Type) or DG (Diffuser + Grille Type)






LED DOWN LIGHT


LINA SERIES Telescopic Spotlight



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
LINA-R52-6W	AC185-265V	6	480/540/600	Ø58x118	Ø52	30
LINA-R70-6W	AC185-265V	6	480/540/600	Ø80x125	Ø70	30
LINA-R130-2x6W	AC185-265V	6x2	960/1080/1200	Ø138x125	Ø130	30
LINA-R140-3x6W	AC185-265V	6x3	1440/1620/1800	Ø146x125	Ø140	30



6W

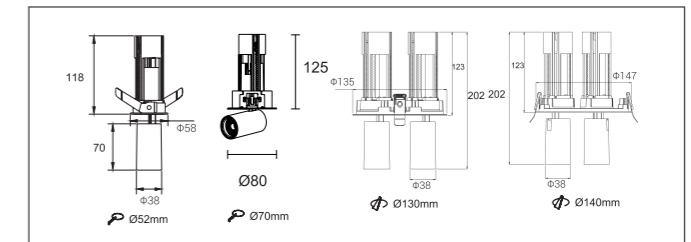


Recessed


LINA SERIES Telescopic Spotlight



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
LINA-S6060-6W	AC185-265V	6	480/540/600	68x68xH123	60x60	30
LINA-S13060-2x6W	AC185-265V	6x2	960/1080/1200	135x68xH123	130x60	30
LINA-S19660-3x6W	AC185-265V	6x3	1440/1620/1800	200x68xH123	196x60	30

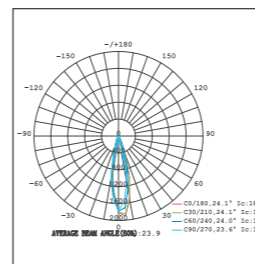

6W

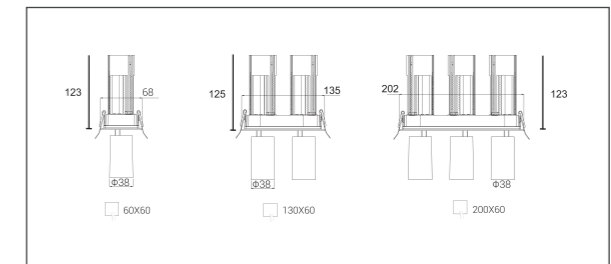


Recessed


LK SERIES Pin Hole Spotlight



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
LK-5W	AC185-265V	5	200/250/300	Ø65xH51	Ø55	100
LK-8W	AC185-265V	8	320/400/480	Ø75*H59	Ø65	100
LK-10W	AC185-265V	10	400/500/600	Ø85*H59	Ø75	100



5W

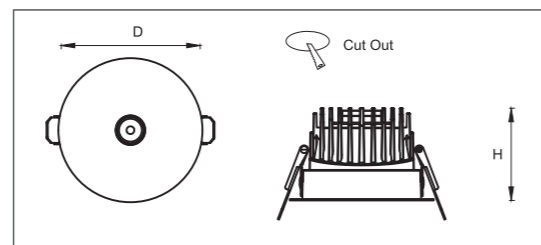


Recessed


YK SERIES Pin Hole Spotlight



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
YK-3W-C	AC185-265V	3	120/135/150	Ø42*H60	Ø35	100
YK-5W-C	AC185-265V	5	200/225/250	Ø62*H60	Ø55	100
YK-7W-C	AC185-265V	7	280/315/350	Ø72*H60	Ø65	100
YK-9W-C	AC185-265V	9	360/405/450	Ø82*H60	Ø75	100
YK-3W-F	AC185-265V	3	120/135/150	Ø42*H40	Ø35	100
YK-5W-F	AC185-265V	5	200/225/250	Ø62*H40	Ø55	100
YK-7W-F	AC185-265V	7	280/315/350	Ø72*H40	Ø65	100
YK-9W-F	AC185-265V	9	360/405/450	Ø82*H40	Ø75	100

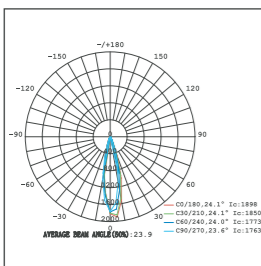

5W

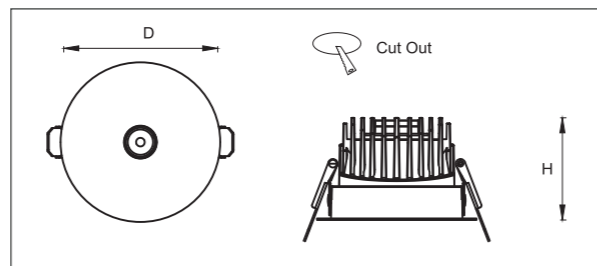


Recessed


CELO SERIES Rotatable Ceiling Light




Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
CELO-5W	AC185-265V	5	325/350/375	Ø70x50	Ø55	100
CELO-7W	AC185-265V	7	455/490/525	Ø88x55	Ø75	100
CELO-12W	AC185-265V	12	1020/1080/1140	Ø110x55	Ø95	50
CELO-20W	AC185-265V	20	1900/2000/2100	Ø135x65	Ø120	30
CELO-30W	AC185-265V	30	2850/3000/3150	Ø175x80	Ø155	20



7W



12W




Recessed


ALGO SERIES Thin Down Light




Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
ALGO-7W	AC185-265V	7	455/490/525	120°	Ø95x28	Ø75	100
ALGO-9W	AC185-265V	9	585/630/675	120°	Ø110x28	Ø85	100
ALGO-12W	AC185-265V	12	900/960/1020	120°	Ø120x28	Ø95	100
ALGO-15W	AC185-265V	15	1125/1200/1275	120°	Ø145x28	Ø110	60
ALGO-18W	AC185-265V	18	1350/1440/1530	120°	Ø160x28	Ø135	60
ALGO-20W	AC185-265V	20	1700/1800/1900	120°	Ø180x28	Ø145	60
ALGO-24W	AC185-265V	24	2040/2160/2280	120°	Ø230x28	Ø190	30

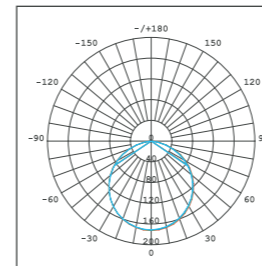

6W

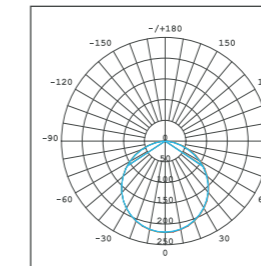

8W

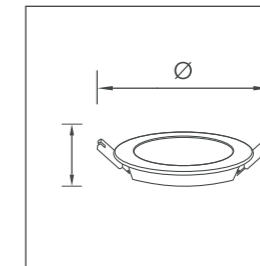


Recessed


ORBIT SERIES Rotatable Ceiling Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
ORBIT-10W	AC185-265V	10	750/800/850	Ø70x100	100
ORBIT-20W	AC185-265V	20	1500/1600/1700	Ø90x110	100
ORBIT-30W	AC185-265V	30	2250/2400/2550	Ø110x115	50
ORBIT-40W	AC185-265V	40	3000/3200/3400	Ø110x150	30



10W




Surface


ORDI SERIES Water-Proof Down Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
ORDI-R12W	AC185-265V	12	900/960/1020	90°	Ø110x59	Ø90	100
ORDI-R20W	AC185-265V	20	1500/1600/1700	90°	Ø127x70	Ø110	60
ORDI-R30W	AC185-265V	30	2250/2400/2550	90°	Ø165x80	Ø145	60
ORDI-R50W	AC185-265V	50	3750/4000/4250	90°	Ø220x90	Ø200	30
ORDI-S12W	AC185-265V	12	900/960/1020	90°	110x110x59	110x110	100
ORDI-S20W	AC185-265V	20	1500/1600/1700	90°	127x127x70	127x127	60
ORDI-S30W	AC185-265V	30	2250/2400/2550	90°	165x165x80	165x165	60
ORDI-S50W	AC185-265V	50	3750/4000/4250	90°	220x220x90	220x220	30

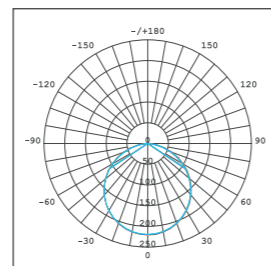

12W

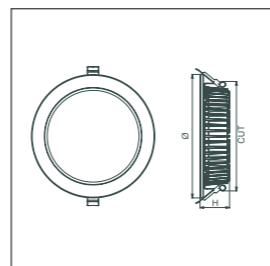


Recessed


LUNO SERIES Recessed Linear Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
LUNO-10W	AC185-265V	10	650/700/750	L148*W45*H38	L135*W35	100
LUNO-20W	AC185-265V	20	1300/1400/1500	L282*W45*H38	L272*W35	100
LUNO-30W	AC185-265V	30	1950/2100/2250	L414*W45*H38	L406*W35	80



10W




Recessed


HELI SERIES Pull-Out Ceiling Spot Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
HELI-R/S12W	AC185-265V	12	1020/1080/1140	15°/24°/50°	90x90x92	80x80	50
HELI-R/S20W	AC185-265V	20	1700/1800/1900	15°/24°/50°	115x115x120	100x100	30
HELI-R/S30W	AC185-265V	30	2550/2700/2850	15°/24°/50°	140x140x145	120x120	18
HELI-R/S40W	AC185-265V	40	3400/3600/3800	15°/24°/50°	160x160x150	145x145	12
HELI-12W*2	AC185-265V	12*2	2040/2160/2280	15°/24°/50°	90x170x92	80x155	30
HELI-20W*2	AC185-265V	20*2	3400/3600/3800	15°/24°/50°	115x210x120	100x190	18
HELI-30W*2	AC185-265V	30*2	5100/5400/5700	15°/24°/50°	140x255x145	120x235	8
HELI-40W*2	AC185-265V	40*2	6800/7200/7600	15°/24°/50°	160x320x150	145x300	6



12W




Recessed


ELE SERIES LED Gimbal Spot Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
ELE-10W	AC185-265V	10	750/800/850	15°/24°/50°	Ø90*45	Ø70	48
ELE-20W	AC185-265V	20	1500/1600/1700	15°/24°/50°	Ø110*57	Ø90	36
ELE-30W	AC185-265V	30	2250/2400/2550	15°/24°/50°	Ø130*63	Ø115	18
ELE-40W	AC185-265V	40	3000/3200/3400	15°/24°/50°	Ø165*75	Ø145	12




10W




Recessed


GUN SERIES Single/Twin Down Light

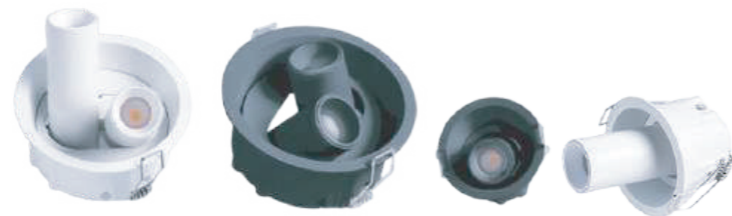

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
GUN-7W-65L	AC185-265V	7	455/490/525	24°	Ø110x59	Ø90	100
GUN-7W-100L	AC185-265V	7	455/490/525	24°	Ø127x70	Ø110	60
GUN-7W-200L	AC185-265V	7	455/490/525	24°	Ø165x80	Ø145	60
GUN-5W*2-65L	AC185-265V	5*2	650/700/750	24°	Ø220x90	Ø200	30
GUN-7W*2-100L	AC185-265V	7*2	910/980/1050	24°	110x110x59	110x110	100

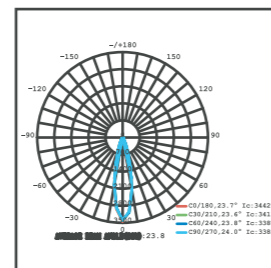

7W

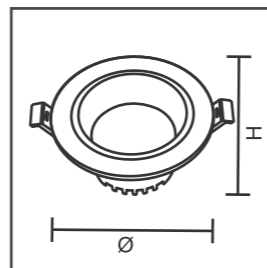

Recessed

Down Light More Options

SP01 Series



Power: 10W / 12W / 15W / 18W / 24W / 30W
Size: Ø61 / Ø72 / Ø82 / Ø82 / Ø93 / Ø103
Cut Size: Ø55 / Ø65 / Ø75 / Ø75 / Ø85 / Ø95
Beam Angle: 15°/24°/36°/55°
Color Temp.: 3000K / 4000K / 6500K

SP02 Series



Power: 15W / 30W / 35W / 40W
Size: Ø82 / Ø104 / Ø120 / Ø130
Cut Size: Ø75 / Ø95 / Ø105 / Ø120
Beam Angle: 15°/24°/36°
Color Temp.: 3000K / 4000K / 6500K

SP03 Series



Power: 15W / 30W / 35W / 40W
Size: Ø82 / Ø104 / Ø120 / Ø130
Cut Size: Ø75 / Ø95 / Ø105 / Ø120
Beam Angle: 15°/24°/36°
Color Temp.: 3000K / 4000K / 6500K

SP04 Series



Power: 6W / 8W / 10W / 12W / 20W / 30W
Size: Ø52 / Ø65 / Ø75 / Ø85 / Ø106 / Ø135
Cut Size: Ø45 / Ø55 / Ø65 / Ø75 / Ø95 / Ø120
Beam Angle: 15°/24°/36°/60°
Color Temp.: 3000K / 4000K / 6500K

SP05 Series



Power: 5W / 7W / 10W / 15W
Size: Ø55 / Ø75 / Ø91 / Ø128
Cut Size: Ø50 / Ø70 / Ø85 / Ø120
Beam Angle: 15°/24°/36°
Color Temp.: 3000K / 4000K / 6500K

SP06 Series



Power: 7W/9W/9W/12W/15W/18W/20W/30W
Size: Ø65 / Ø65 / Ø85 / Ø85 / Ø85 / Ø105 / Ø105
Cut Size: Ø55 / Ø55 / Ø75 / Ø75 / Ø75 / Ø95 / Ø95
Beam Angle: 15°/24°/36°
Color Temp.: 3000K / 4000K / 6500K

SP07 Series



Power: 7W / 12W *1 *2 *3 *4
Size: 75*75/140/225 140*140 90*90/180/270 180*180
Cut Size: 65*65/130/200 130*130 75*75/150/250 160*160
Beam Angle: 15°/24°/36°
Color Temp.: 3000K / 4000K / 6500K

SP08 Series



Power: 12W / 18W / 25W / 40W / 50W
Size: Ø88 / Ø105 / Ø135 / Ø167 / Ø191
Cut Size: Ø75 / Ø95 / Ø120 / Ø155 / Ø180
Beam Angle: 15°/24°/36°/60°
Color Temp.: 3000K / 4000K / 6500K

SP09 Series



Power: 10W / 15W / 20W / 25W
Size: Ø83 / Ø83 / Ø100 / Ø100
Cut Size: Ø75 / Ø75 / Ø95 / Ø95
Beam Angle: 15°/24°/36°/60°
Color Temp.: 3000K / 4000K / 6500K

SP10 Series



Power: 7W / 12W / 18W / 25W
Size: Ø64 / Ø84 / Ø84 / Ø105
Cut Size: Ø55 / Ø75 / Ø75 / Ø95
Beam Angle: 15°/24°/36°
Color Temp.: 3000K / 4000K / 6500K

SP11 Series



Power: 7W / 12W / 20W / 25W
Size: Ø65 / Ø85 / Ø101 / Ø118
Cut Size: Ø55 / Ø75 / Ø95 / Ø105
Beam Angle: 15°/24°/36°
Color Temp.: 3000K / 4000K / 6500K

SP12 Series



Power: 12W / 18W / 25W / 40W
Size: Ø92 / Ø110 / Ø135 / Ø165
Cut Size: Ø80 / Ø100 / Ø120 / Ø150
Beam Angle: 15°/24°/36°
Color Temp.: 3000K / 4000K / 6500K

SP13 Series



Power: 7W / 12W / 15W / 25W
Size: Ø65 / Ø85 / Ø85 / Ø115
Cut Size: Ø55 / Ø75 / Ø75 / Ø105
Beam Angle: 15°/24°/36°
Color Temp.: 3000K / 4000K / 6500K

SP14 Series



Power: 12W*1*2*3*4 / 20W*1*2
Size: 85*85/168/256 165*165 105*105/208
Cut Size: 75*75/150/240 150*150 95*95/190
Beam Angle: 15°/24°/36°
Color Temp.: 3000K / 4000K / 6500K

SP15 Series



Power: 7W / 12W / 18W / 7W / 12W / 18W
Size: Ø85 / Ø100 / Ø125 / Ø69 / Ø83 / Ø108
Cut Size: Ø75 / Ø90 / Ø115 / Ø69 / Ø83 / Ø108
Beam Angle: 24°/60°
Color Temp.: 3000K / 4000K / 6500K

SP16 Series



Power: 10W / 15W / 25W / 35W
Size: Ø90 / Ø110 / Ø135 / Ø160
Cut Size: Ø75 / Ø95 / Ø120 / Ø145
Beam Angle: 15°/24°
Color Temp.: 3000K / 4000K / 6500K

Down Light More Options

SP17 Series



Power: 10W / 15W / 25W / 35W *1*2
 Size: 90*90/170 115*115/210 140*140/250 160*160/303
 Cut: 75*75/155 95*95/195 120*120/230 145*145/280
 Beam Angle: 24°/60°
 Color Temp.: 3000K / 4000K / 6500K

SS01 Series



Power: 1W / 3W / 5W / 7W
 Size: Ø35 / Ø45 / Ø58 / Ø70
 Cut Size: Ø30 / Ø40 / Ø50 / Ø60
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

SS05 Series



Power: 9W / 12W / 15W
 Size: Ø59 / Ø70 / Ø82
 Cut Size: Ø55 / Ø65 / Ø75
 Beam Angle: 15°/24°/36°/60°
 Color Temp.: 3000K / 4000K / 6500K

SF01 Series



Power: 10W / 15W / 20W / 25W
 Size: Ø72 / Ø72 / Ø92 / Ø92
 Cut Size: N/A
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

SP18 Series



Power: 6W / 12W / 25W
 Size: Ø44 / Ø73 / Ø95
 Cut Size: Ø40 / Ø70 / Ø90
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

SS02 Series



Power: 1W / 3W / 5W / 7W
 Size: Ø35 / Ø45 / Ø58 / Ø65
 Cut Size: Ø30 / Ø40 / Ø50 / Ø60
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

SS06 Series



Power: 3W / 7W / 10W / 10W / 12W / 15W
 Size: Ø30 / Ø42 / Ø52 / Ø62 / Ø72 / Ø82
 Cut Size: Ø25 / Ø35 / Ø45 / Ø55 / Ø65 / Ø75
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

SF02 Series



Power: 10W / 15W / 20W / 30W
 Size: Ø72 / Ø72 / Ø92 / Ø92
 Cut Size: N/A
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

SP19 Series



Power: 8W / 20W / 35W *1 *2
 Size: 62*62/140 84*84/194 110*110/239
 Cut Size: 55*55/130 75*75/180 95*95/225
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

SS03 Series



Power: 7W / 9W / 12W
 Size: Ø46 / Ø56 / Ø66
 Cut Size: Ø40 / Ø50 / Ø60
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

SS07 Series



Power: 10W / 15W / 20W
 Size: Ø62 / Ø72 / Ø82
 Cut Size: Ø55 / Ø65 / Ø75
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

SF03 Series



Power: 5W / 10W / 15W
 Size: Ø62 / Ø85 / Ø102
 Cut Size: N/A
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

SP20 Series



Power: 7W
 Size: Ø85*H70mm
 Cut Size: Ø75mm
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

SS04 Series



Power: 7W / 9W / 12W
 Size: Ø40 / Ø50 / Ø60
 Cut Size: Ø35 / Ø45 / Ø55
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

SS08 Series



Power: 5W / 9W / 3W
 Size: Ø29 / Ø42 / Ø52
 Cut Size: Ø25 / Ø35 / Ø45
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K


SF04 Series



Power: 7W / 7W*2 / 15W / 15W*2
 Size: Ø75 / 182*75 / Ø100 / 245*100
 Cut Size: N/A
 Beam Angle: 120°
 Color Temp.: 3000K / 4000K / 6500K

Down Light More Options

SF05 Series



Power: 7W / 7W*2 / 15W / 15W*2
 Size: Ø75 / 182*75 / Ø100 / 245*100
 Cut Size: N/A
 Beam Angle: 15°/24°/36°/60°
 Color Temp.: 3000K / 4000K / 6500K

SF09 Series



Power: 5W/7W/2*5W/2*7W/12W/15W/2*15W/20W/25W
 Size: 55*55/55*55/110/55*165/95*95/95*95/95*95/115*115/115*115
 Cut Size: N/A
 Beam Angle: 15°/24°/36°/60°
 Color Temp.: 3000K / 4000K / 6500K

SF13 Series



Power: 10W / 20W / 30W / 40W
 Size: 90*90 / 110*110 / 130*130 / 160*160
 Cut Size: N/A
 Beam Angle: 60°
 Color Temp.: 3000K / 4000K / 6500K

WS03 Series



Power: 7W / 10W / 12W / 20W / 20W / 30W
 Size: Ø62 / Ø62 / Ø84 / Ø84 / Ø110 / Ø110
 Cut Size: Ø55 / Ø55 / Ø75 / Ø75 / Ø95 / Ø95
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

SF06 Series



Power: 7W / 10W / 18W / 24W / 30W / 36W
 Size: Ø78 / Ø97 / Ø120 / Ø150 / Ø175 / Ø200
 Cut Size: N/A
 Beam Angle: 15°/24°/36°/60°
 Color Temp.: 3000K / 4000K / 6500K

SF10 Series



Power: 7W / 9W / 12W / 15W
 Size: Ø60 / Ø75 / Ø88 / Ø112
 Cut Size: N/A
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

SF14 Series



Power: 7W / 7W*2 / 12W / 12W*2
 Size: 100*100 / 100*193 / 100*100 / 100*193
 Cut Size: N/A
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

WS04 Series



Power: 12W / 18W / 24W / 40W / 50W / 60W
 Size: Ø85 / Ø110 / Ø135 / Ø180 / Ø180 / Ø242
 Cut Size: Ø75 / Ø95 / Ø120 / Ø160 / Ø160 / Ø220
 Beam Angle: 24°/45°/60°
 Color Temp.: 3000K / 4000K / 6500K

SF07 Series



Power: 7W / 10W / 18W / 24W / 30W / 36W
 Size: Ø78 / Ø97 / Ø120 / Ø150 / Ø175 / Ø200
 Cut Size: N/A
 Beam Angle: 120°
 Color Temp.: 3000K / 4000K / 6500K

SF11 Series



Power: 12W / 18W / 24W / 30W / 50W / 60W / 100W
 Size: Ø80 / Ø100 / Ø120 / Ø150 / Ø170 / Ø205 / Ø235
 Cut Size: N/A
 Beam Angle: 15°/24°/36°/60°
 Color Temp.: 3000K / 4000K / 6500K

WS01 Series




Power: 10W / 18W / 30W / 40W / 50W / 60W
 Size: Ø85 / Ø105 / Ø131 / Ø150 / Ø191 / Ø215
 Cut Size: Ø75 / Ø95 / Ø120 / Ø140 / Ø180 / Ø200
 Beam Angle: 15°/24°/36°/60°
 Color Temp.: 3000K / 4000K / 6500K

WS05 Series




Power: 7W / 10W / 15W
 Size: Ø65 / Ø85 / Ø105
 Cut Size: Ø55 / Ø75 / Ø95
 Beam Angle: 15°/24°/36°/50°
 Color Temp.: 3000K / 4000K / 6500K

SF08 Series



Power: 9W / 15W / 20W / 25W / 30W / 35W
 Size: Ø80 / Ø100 / Ø120 / Ø150 / Ø170 / Ø200
 Cut Size: N/A
 Beam Angle: 120°
 Color Temp.: 3000K / 4000K / 6500K

SF12 Series



Power: 10W / 18W / 20W / 30W / 40W
 Size: Ø55 / Ø75 / Ø95 / Ø115
 Cut Size: N/A
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

WS02 Series



Power: 7W / 10W / 12W / 20W / 20W / 30W
 Size: Ø62 / Ø62 / Ø84 / Ø84 / Ø110 / Ø110
 Cut Size: Ø55 / Ø55 / Ø75 / Ø75 / Ø95 / Ø95
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

WS06 Series



Power: 8W / 15W / 20W
 Size: Ø65 / Ø92 / Ø92
 Cut Size: Ø65 / Ø80 / Ø80
 Beam Angle: 15°/24°/36°
 Color Temp.: 3000K / 4000K / 6500K

Down Light More Options

WS07 Series



Power: 10W / 15W / 20W
Size: Ø72 / Ø92 / Ø92
Cut Size: Ø65 / Ø80 / Ø80
Beam Angle: 15°/24°/36°
Color Temp.: 3000K / 4000K / 6500K

WS08 Series



Power: 5W / 10W / 20W
Size: Ø65 / Ø90 / Ø106
Cut Size: Ø55 / Ø75 / Ø95
Beam Angle: 15°/24°/36°
Color Temp.: 3000K / 4000K / 6500K

WS09 Series



Power: 10W / 15W / 20W / 30W / 40W / 50W
Size: Ø95 / Ø115 / Ø140 / Ø165 / Ø195 Ø230
Cut Size: Ø75 / Ø95 / Ø120 / Ø145 / Ø165 / Ø200
Beam Angle: 60°
Color Temp.: 3000K / 4000K / 6500K

WS10 Series



Power: 15W / 20W / 30W / 40W
Size: Ø115 / Ø135 / Ø170 / Ø195
Cut Size: Ø95 / Ø120 / Ø150 / Ø170
Beam Angle: 50°
Color Temp.: 3000K / 4000K / 6500K

WS11 Series



Power: 10/12W/15W/18W/30W/35W/50W/60W/70W/80W
Size: Ø75/Ø75/Ø95/Ø95/Ø115/Ø140/
Ø170/Ø170/Ø170/Ø170
Beam Angle: 24°/45°
Color Temp.: 3000K / 4000K / 6500K

WS12 Series



Power: 12W / 18W / 24W
Size: Ø62 / Ø83 / Ø105
Cut Size: N/A
Beam Angle: 15°/24°/36°/50°
Color Temp.: 3000K / 4000K / 6500K

LD01 Series



Power: 3W / 6W / 12W
Size: L73 / 133 / 253 *W32*H47.5mm
Cut Size: L68 / 128 / 248 *W25
Beam Angle: 30°
Color Temp.: 3000K / 4000K / 6500K

LD02 Series



Power: 2*2W / 4*2W / 6*2W / 8*2W / 12*2W
Size: L68 / 122 / 175 / 230 / 338*W40*H55mm
Cut Size: L60/115/168/220/330*W32mm
Beam Angle: 15°/30°/45°
Color Temp.: 3000K / 4000K / 6500K

LD03 Series



Power: 3*2W / 5*2W / 10*2W
Size: L102 / 162 / 310 *W41*H54mm
Cut Size: L60 / 120 / 270 *W35mm
Beam Angle: 24°/36°/45°
Color Temp.: 3000K / 4000K / 6500K

LD04 Series



Power: 3*1W / 6*1W / 12*1W / 8W / 15W
Size: L62 / 108 / 205 *W32 *H39mm
Cut Size: L55 / 100 / 200 *W25mm
Beam Angle: 15°/24°/30° / 60° / 30° / 30°
Color Temp.: 3000K / 4000K / 6500K

LD05 Series



Power: 2*2W / 4*2W / 4*2W / 6*2W / 12*2W
Size: L63*40 / 112*40 / 67*63 / 162*40 / 312*40*43mm
Cut Size: 55*35 / 105*35 / 57*62 / 155*35 / 304*35mm
Beam Angle: 30°
Color Temp.: 3000K / 4000K / 6500K

LD06 Series



Power: 4W / 8W / 12W / 24W
Size: L70 / 120 / 170 / 320 *W48*H43mm
Cut Size: L65 / 115 / 165 / 315 *W40mm
Beam Angle: 30°
Color Temp.: 3000K / 4000K / 6500K




LED TRACK LIGHT (2/3/4 Wires)


BFM SERIES LED Track Light - ECO



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Packing QTY (pcs/CTN)
BFM-10W	AC185-265V	6.5	487/520/552	24°/36°/15°	Ø60*100	100
BFM-20W	AC185-265V	10.5	787/840/892	24°/36°/15°	Ø77*105	100
BFM-30W	AC185-265V	19	1425/1520/1615	24°/36°/15°	Ø89*130	50



10W




Track Mounted


EXB SERIES LED Track Light - Premium



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Packing QTY (pcs/CTN)
EXB-20W	AC185-265V	20	1700/1800/1900	24°/36°/15°	Ø56x136	50
EXB-30W	AC185-265V	30	2550/2700/2850	24°/36°/15°	Ø67x158	40
EXB-40W	AC185-265V	40	3400/3600/3800	24°/36°/15°	Ø77*169	30
EXB-50W	AC185-265V	50	4250/4500/4750	24°/36°/15°	Ø88*180	20



10W




Track Mounted


LUGA SERIES Recessed Linear Spot Light




Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Packing QTY (pcs/CTN)
LUGA-10G / D	AC185-265V	10	750/800/850	G=24° / D=120°	L200*W35*H60	50
LUGA-20G / D	AC185-265V	20	1500/1600/1700	G=24° / D=120°	L335*W35*H60	30
LUGA-30G / D	AC185-265V	30	2250/2400/2550	G=24° / D=120°	L465*W35*H60	30
LUGA-40G / D	AC185-265V	40	3000/3200/3400	G=24° / D=120°	L598*W35*H60	30



10W










10W

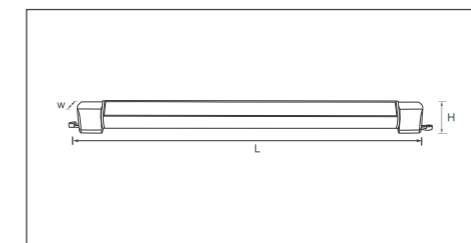

Track Mounted

DL66 & DL68 & DL36 LED Track Linear Light

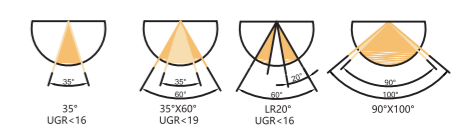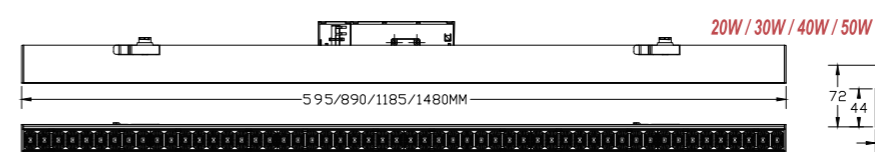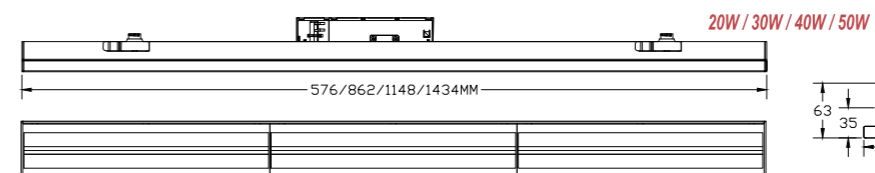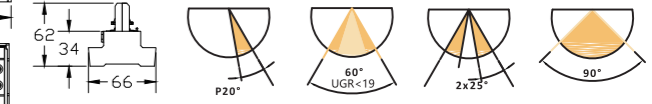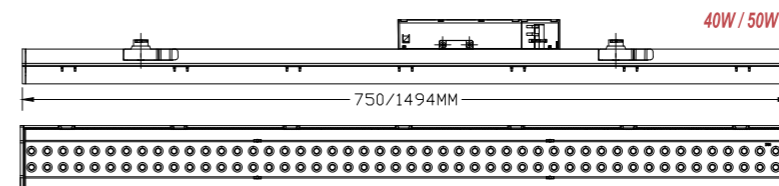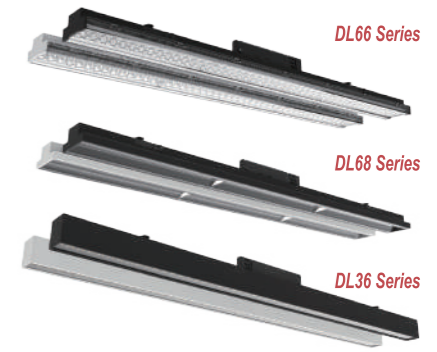

Track Light More Options



FX Series
 Power: 10W / 20W / 30W / 40W / 50W
 Size: Ø50 / Ø50 / Ø62 / Ø75 / Ø83mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K / 3CCT
 Phase: 1Phase 2Wires



YS Series
 Power: 30W
 Size: Ø57 / Ø74 / Ø85 / Ø96mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K / 3CCT
 Phase: 1Phase 2Wires



LP Series
 Power: 20W / 30W / 40W
 Size: Ø75 / Ø89 / Ø99mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K / 3CCT
 Phase: 1Phase 2Wires



NW Series
 Power: 10W / 20W / 30W / 40W
 Size: Ø57 / Ø74 / Ø85 / Ø96mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K / 3CCT
 Phase: 1Phase 2Wires



HW-C Series
 Power: 10W / 20W / 30W
 Size: Ø68 / Ø92 / Ø116mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K
 Phase: 1Phase 2Wires



BX Series
 Power: 7W / 12W
 Size: Ø50*100 / 115mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K
 Phase: 1Phase 2Wires



HEXAGON Series
 Bluetooth Speaker
 Power: 12W
 Size: Ø82*220mm
 Color Temp.: RGBW
 Phase: 2 / 3 / 4Wires / Surface / M20 Magnetic Track
 Host & Sub Switch



NLB Series
 Power: 20W / 30W / 40W / 50W
 Size: Ø55 / Ø74 / Ø85 / Ø96mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K / 3CCT
 Phase: 1Phase 2Wires



QF Series
 Power: 20W / 30W / 40W / 50W
 Size: Ø60 / Ø70 / Ø80 / Ø90mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K
 Phase: 1Phase 2Wires



LP Series
 Power: 30W
 Size: Ø75*168mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K / 3CCT
 Phase: 1Phase 2Wires



S Series
 Power: 20W / 30W / 40W / 50W
 Size: Ø89*128 / 128 / 138 / 148mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K
 Phase: 1Phase 2Wires



NKC Series
 Power: 10W / 20W / 30W / 40W
 Size: Ø50 / Ø56 / Ø67 / Ø77mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K
 Phase: 1Phase 2Wires



NKS Series
 Power: 10W / 20W / 30W / 40W
 Size: Ø50 / Ø56 / Ø67 / Ø77mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K
 Phase: 1Phase 2Wires



H Series
 Power: 20W / 30W
 Size: Ø100*158mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K
 Phase: 1Phase 2Wires



FGL Series
 Power: 10W / 20W / 30W
 Size: Ø50 / Ø70 / Ø90mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K
 Phase: 1Phase 2Wires



Q Series
 Power: 20W / 30W / 40W
 Size: Ø92*120 / 140 / 155mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K
 Phase: 1Phase 2Wires



HW-F Series
 Power: 10W / 20W / 30W
 Size: Ø68 / Ø92 / Ø116mm
 Beam Angle: 120°
 Color Temp.: 3000K / 4000K / 6500K
 Phase: 1Phase 2Wires




HW-S Series
 Power: 10W / 20W / 30W
 Size: Ø68 / Ø92 / Ø116mm
 Beam Angle: 24° / 36° / 15°
 Color Temp.: 3000K / 4000K / 6500K
 Phase: 1Phase 2Wires



HW-CF Series
 Power: 10W / 20W / 30W
 Size: Ø68 / Ø92 / Ø116mm
 Beam Angle: 120°
 Color Temp.: 3000K / 4000K / 6500K
 Phase: 1Phase 2Wires

Track Rail - 1 & 3 Phase 2 / 3 / 4 Wires






2 Wires | 1 Phase



3 Wires | 1 Phase



4 Wires | 3 Phases

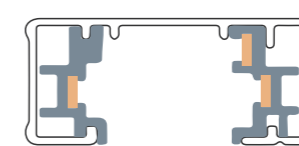


Code	Material	Finish	Size (mm)	Packing QTY (pcs/CTN)
2 Wires Track	Aluminum + PC	Black / White	1m / 1.5m / 2m / 3m	20
3 Wires Track	Aluminum + PC	Black / White	1m / 1.5m / 2m / 3m	20
4 Wires Track	Aluminum + PC	Black / White	1m / 1.5m / 2m / 3m	10




SUPER MARKET TRACK LIGHT

LANCER-II & III SERIES Super Market Track Linear

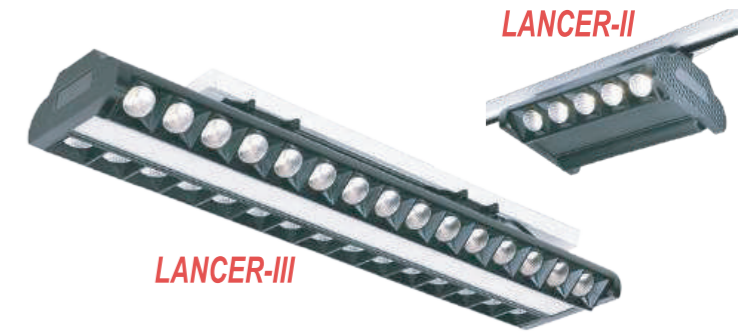


Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Packing QTY (pcs/CTN)
LANCER III-40W	AC185-265V	40	4600/4800/5000	36°+120°+36°	L220*W139.5*H53	10
LANCER III-80W	AC185-265V	80	9200/9600/10000	36°+120°+36°	L400*W139.5*H53	10
LANCER III-120W	AC185-265V	120	13800/14400/15000	36°+120°+36°	L600*W139.5*H53	10
LANCER III-200W	AC185-265V	200	23000/24000/25000	36°+120°+36°	L1170*W139.5*H53	5

Note: LANCER II without Middle Diffuser Linear



20W




Track Mounted


LANCER-I SERIES Super Market Track Linear



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Packing QTY (pcs/CTN)
LANCER I-20W	AC185-265V	20	2300/2400/2500	24°/36°/15°	L220*W50*H72	40
LANCER I-40W	AC185-265V	40	4600/4800/5000	24°/36°/15°	L400*W50*H72	40
LANCER I-60W	AC185-265V	60	6900/7200/7500	24°/36°/15°	L600*W50*H72	20
LANCER I-80W	AC185-265V	100	11500/12000/12500	24°/36°/15°	L1170*W50*H72	20



20W



Track Mounted




LED OFFICE LINEAR LIGHT

PV SERIES Plastic Office Linear Light - ECO




CRI≥80
 SMD
 25000H
 110° Beam Angle
 Non Dimmable
 PVC Material

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
PV-1.2M-24W	AC185-265V	24	1080/1200/1320	L1200*W50*H40	25
PV-1.2M-36W	AC185-265V	36	1620/1800/1980	L1200*W70*H40	20
PV-1.2M-48W	AC185-265V	48	2160/2400/2640	L1200*W100*H40	20




48W

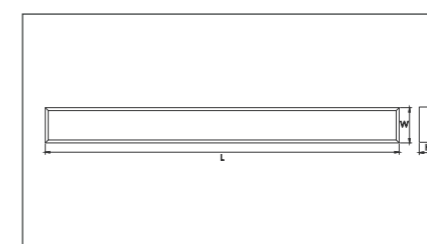


Suspension

LL57 SERIES Aluminum Office Linear Light- Premium

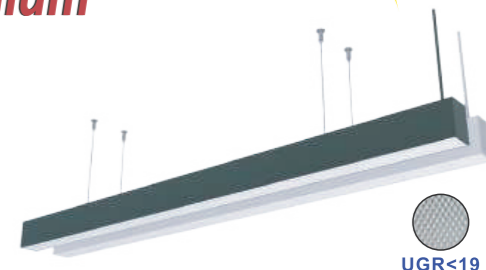


CRI≥80
 SMD
 25000H
 Non Dimmable
 Aluminum Material


Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Cut-out (mm)	Packing QTY (pcs/CTN)
LL5760-20W	AC185-265V	20	2500/2600/2700	120°	L600*W50*H70	80x80	50
LL5790-30W	AC185-265V	30	3750/3900/4050	120°	L900*W50*H70	100x100	30
LL57120-40W	AC185-265V	40	5000/5200/5400	120°	L1200*W50*H70	120x120	18
LL57150-50W	AC185-265V	50	6250/6500/6750	120°	L1500*W50*H70	145x145	12



48W

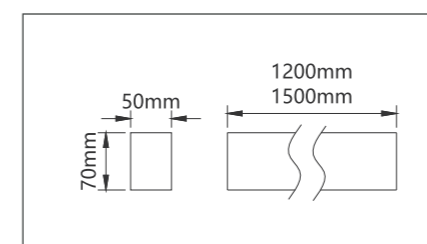


Suspension

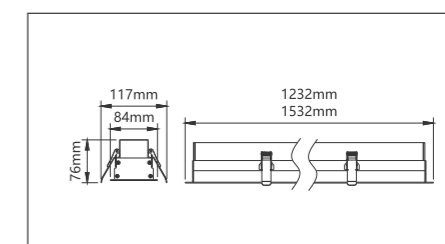

Recessed Frame



M20 LED MAGNETIC TRACK LIGHT

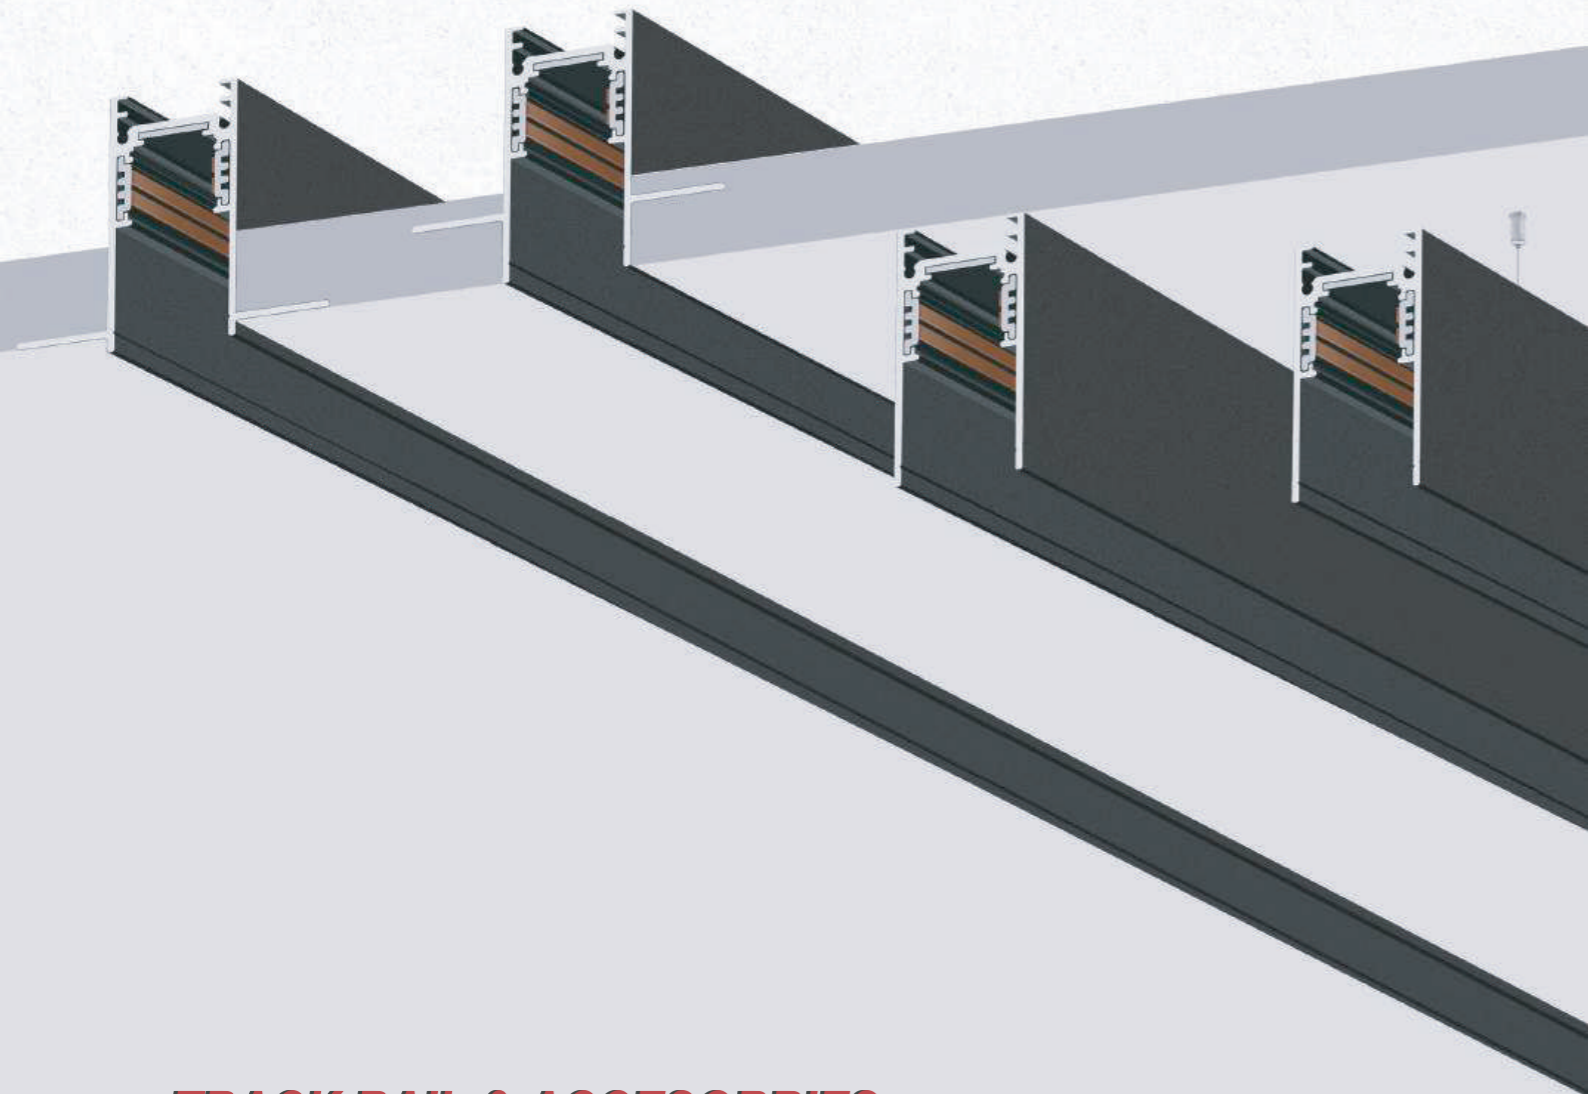


TRACK RAIL & ACCESORRIES

Surface Track
Recessed Track
Trimless Recessed Track
L Cornors (Same Surface)
C Cornors (Wall to Ceiling)
Connectors


M20-TR-MZ Surface Track

Code	Size (mm)
M20-TR-MZ	W27*H51*L1000 / 2000 / 3000
M20-L-MZ	
M20-C-MZ	

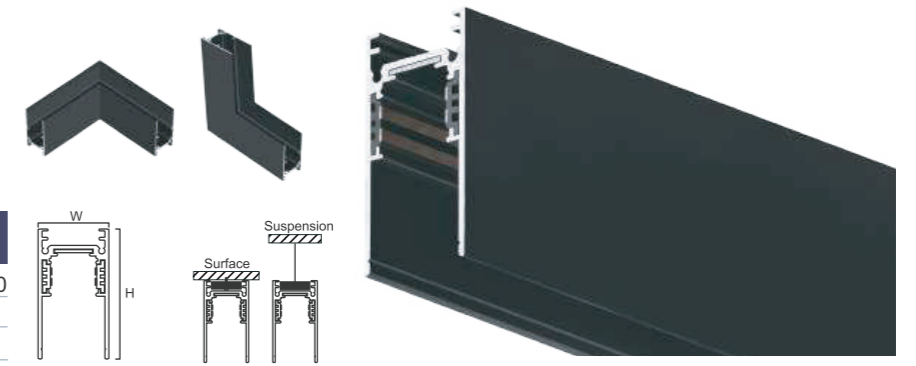


M20-TR-YM Recessed Track

Code	Size (mm)
M20-TR-YM	W59*H47*L1000 / 2000 / 3000
M20-L-YM	
M20-C-YM	

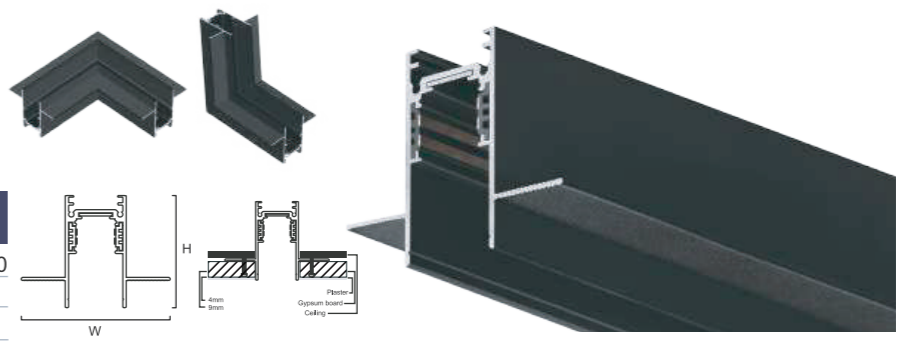

M20-TR-PH Recessed Track

Code	Size (mm)
M20-TR-PH	W59*H47*L1000 / 2000 / 3000
M20-L-PH	
M20-C-PH	

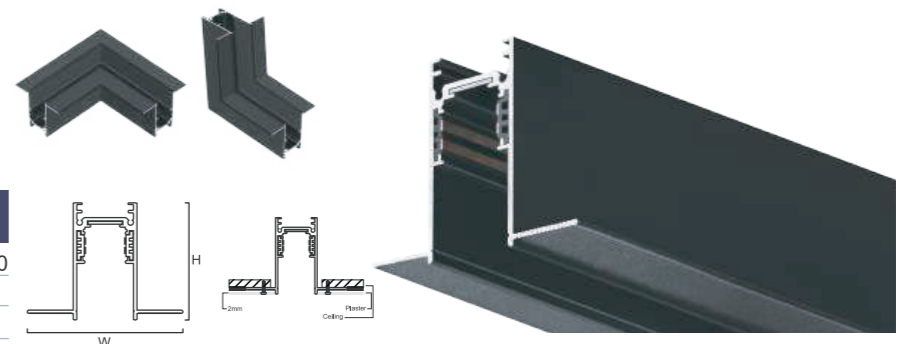

M20 Accessories



M20-IM (Input Module)

M20-SC (Straight Connector)


M20-SC2 (Straight Connector-No Wire)

M20-CC (Corner Connector)

M20-CP (Connection Plate)

M20-HW (Hanging Wire)

M20-D100W / 200W / 300W (Power Supply | Smart Driver Optional)

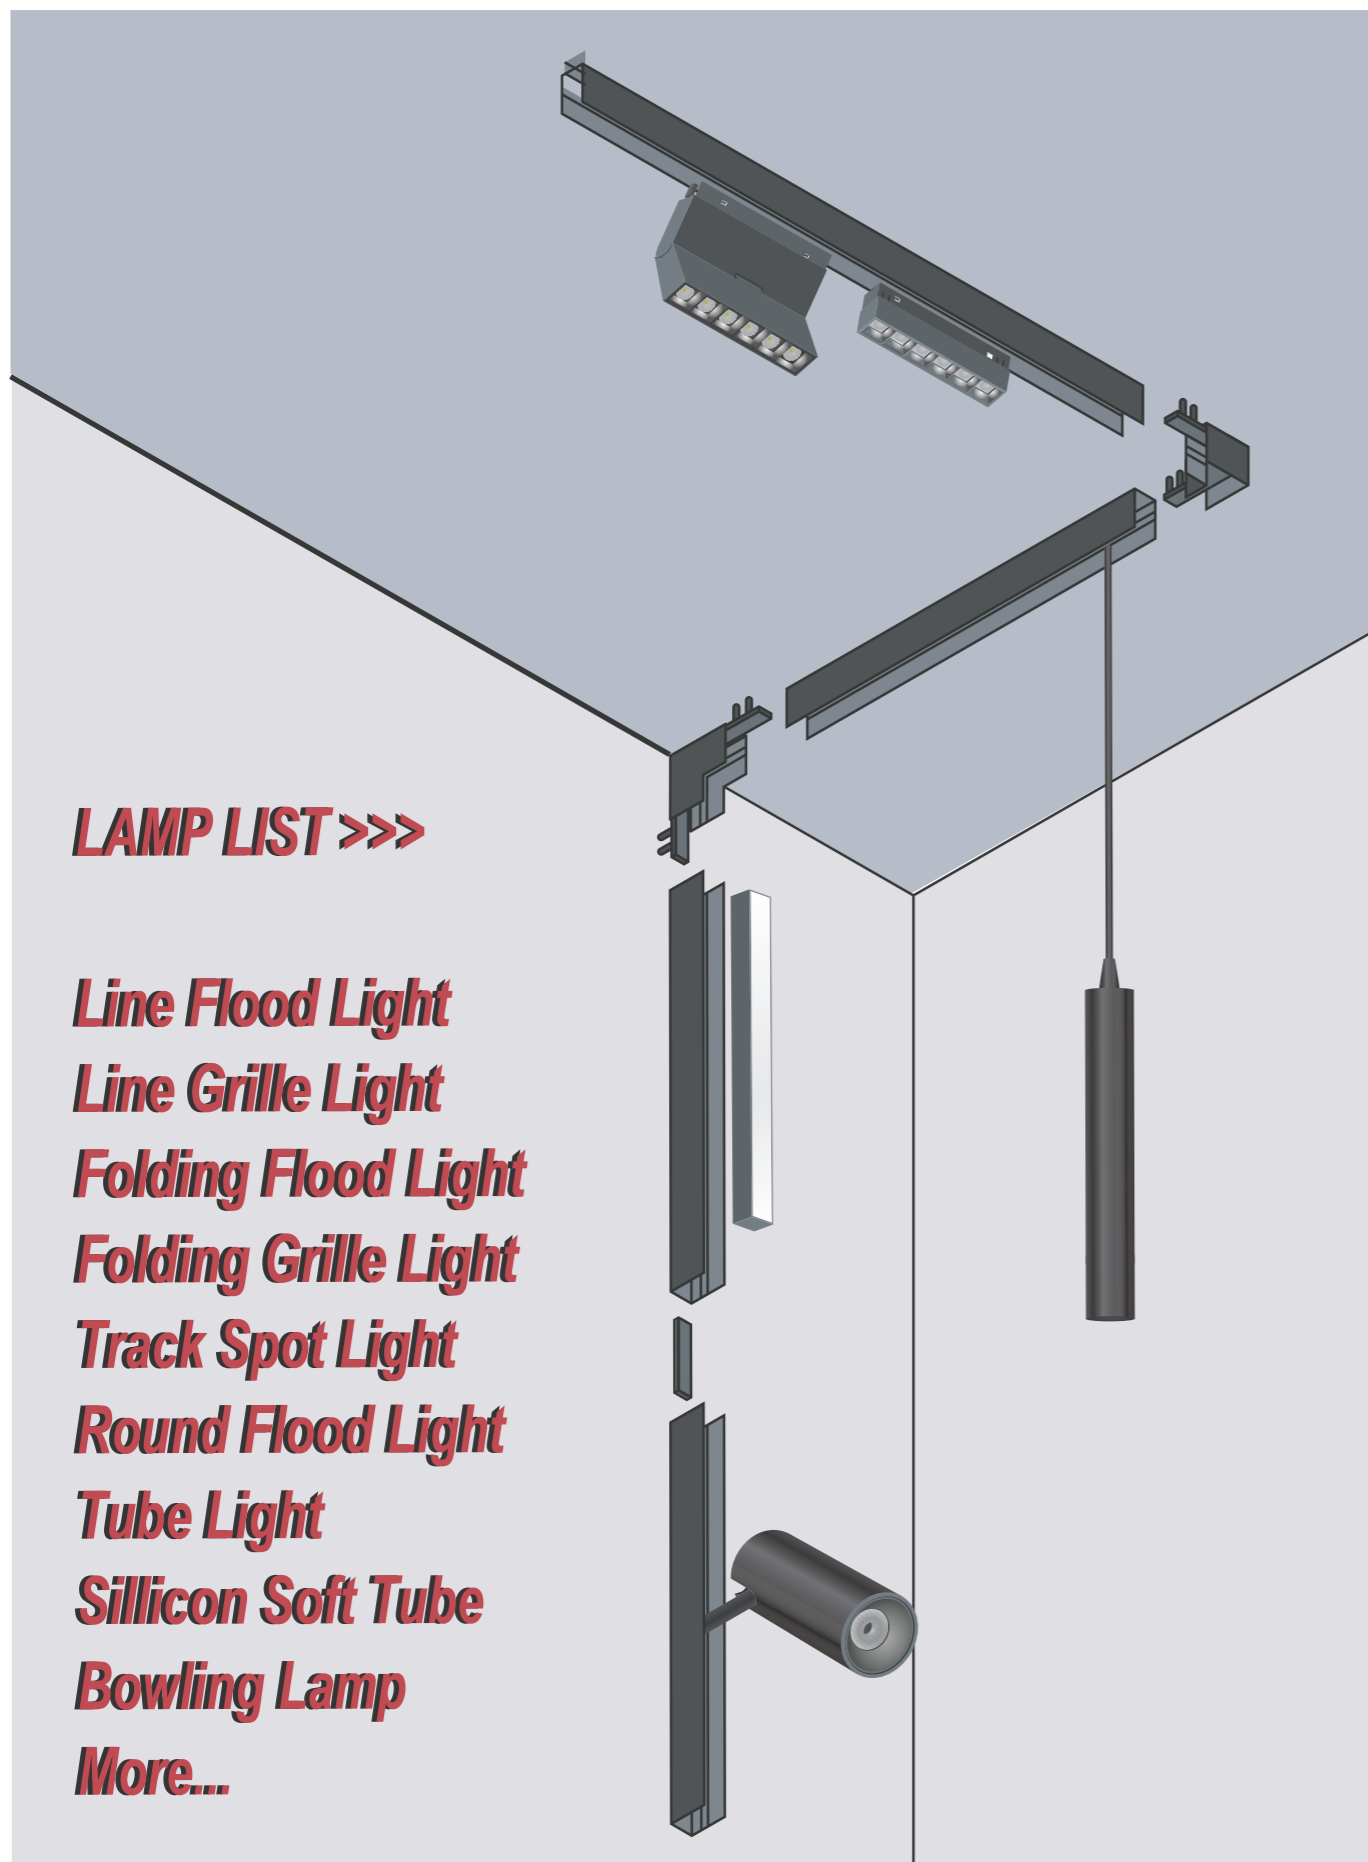


LAMP LIST >>>



- Line Flood Light**
- Line Grille Light**
- Folding Flood Light**
- Folding Grille Light**
- Track Spot Light**
- Round Flood Light**
- Tube Light**
- Silicon Soft Tube**
- Bowling Lamp**
- More...**

Line Flood Light

CRI≥80
 SMD
 50000H
 110° Beam Angle
 Aluminum Material

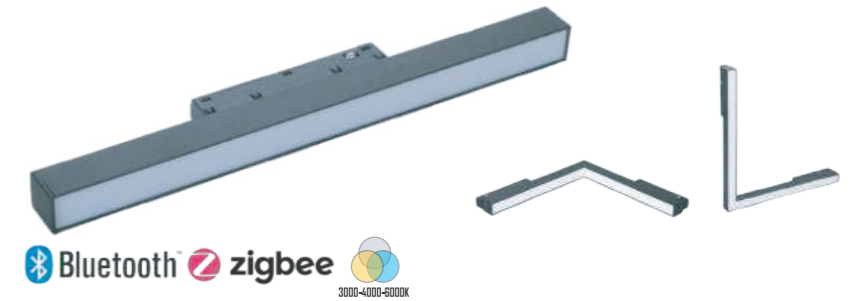


Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
M20-S12	DC48V	12	780/840/900	L300*W22*H25mm	50
M20-S24	DC48V	24	1560/1680/1800	L600*W22*H25mm	50
M20-S36	DC48V	36	2340/2520/2700	L900*W22*H25mm	30
M20-S48	DC48V	48	3120/3360/3600	L1200*W22*H25mm	30
M20-L20D	DC48V	20	1300/1400/1500	L320*W300*H25mm	30
M20-L20DI	DC48V	20	1300/1400/1500	L320*W300*H25mm	30

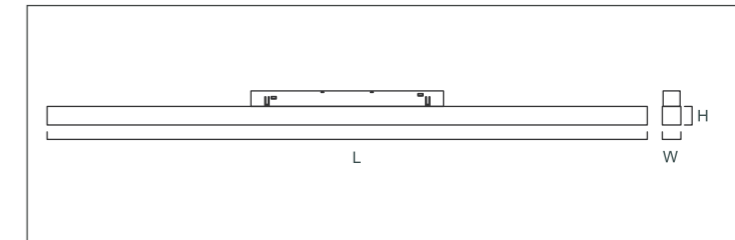



12W

Line Grille Light

CRI≥80
 SMD
 50000H
 24° Beam Angle
 Aluminum Material

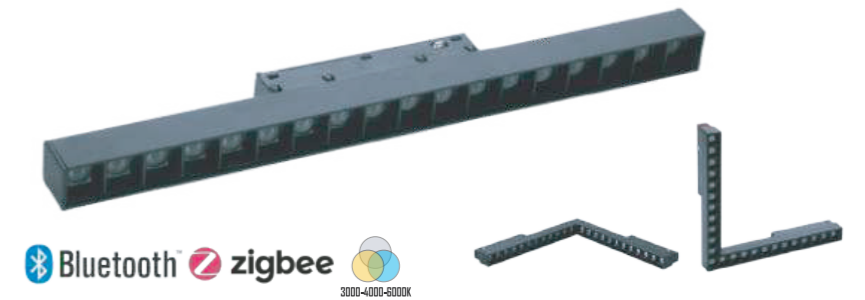

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
M20-6T	DC48V	6	390/420/450	L110*W22*H25mm	100
M20-12T	DC48V	12	780/840/900	L220*W22*H25mm	50
M20-18T	DC48V	18	1170/1260/1350	L330*W22*H25mm	50
M20-24T	DC48V	24	1560/1680/1800	L440*W22*H25mm	50
M20-36T	DC48V	36	2340/2520/2700	L660*W22*H25mm	50
M20-L20G	DC48V	20	1300/1400/1500	L245*W220*H25mm	30
M20-L20GI	DC48V	20	1300/1400/1500	L245*W220*H25mm	30

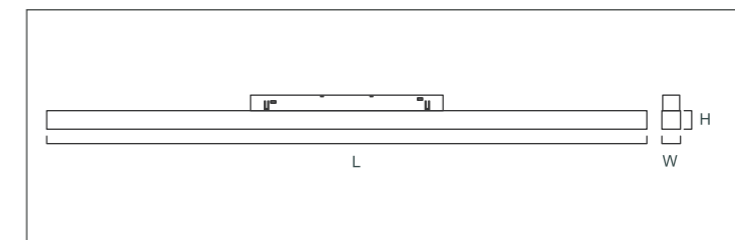



12W

Folding Flood Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
M20-ZD06D	DC48V	6	390/420/450	L117*W22m*H87mm	30
M20-ZD12D	DC48V	12	780/840/900	L230*W22m*H87mm	30
M20-ZD18D	DC48V	18	1170/1260/1350	L330*W22m*H87mm	30

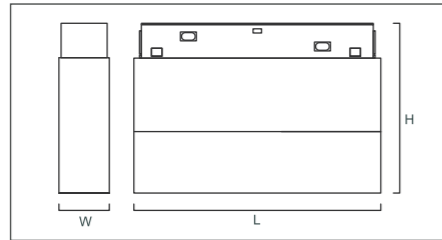



12W

Folding Grille Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
M20-ZD06	DC48V	6	390/420/450	L117*W22m*H87mm	30
M20-ZD12	DC48V	12	780/840/900	L230*W22m*H87mm	30
M20-ZD18	DC48V	18	1170/1260/1350	L330*W22m*H87mm	30

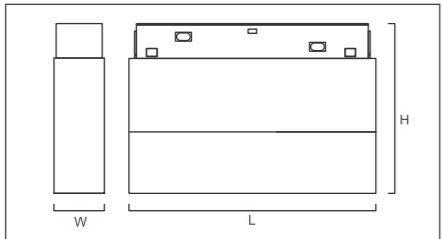



12W

Round Flood Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
M20-RD9	DC48V	9	585/630/675	Ø100*W30*L135	30
M20-RD15	DC48V	15	975/1050/1125	Ø120*W30*L155	30
M20-RD24	DC48V	24	1560/1680/1800	Ø140*W30*L175	30

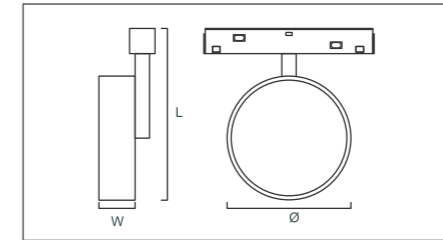



12W

Spot Track Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
M20-TR7	DC48V	7	455/490/525	Ø45*H110	50
M20-TR12	DC48V	12	780/840/900	Ø45*H110	50
M20-TR24	DC48V	24	1560/1680/1800	Ø55*H135	50

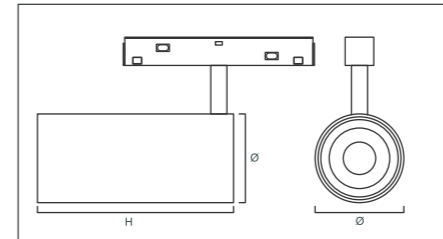



12W

Bowling Lamp



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
M20-MBO-A	DC48V	12	780/840/900	Ø50	30

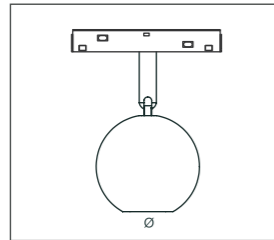



12W

Cylinder Hanging Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
M20-DX7	DC48V	7	455/490/525	Ø49*H300	35
M20-DX12	DC48V	12	780/840/900	Ø49*H300	35

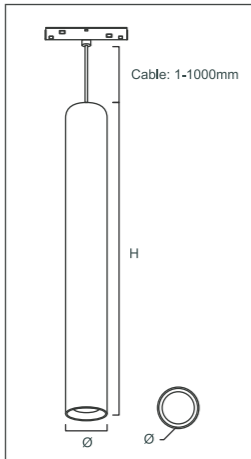



12W

Round Flood Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
M20-TUBE10	DC48V	10	650/700/750	Ø87*W25*L300	30
M20-TUBE20	DC48V	20	1300/1400/1500	Ø87*W25*L600	30
M20-TUBE30	DC48V	30	1950/2100/2250	Ø87*W25*L900	30

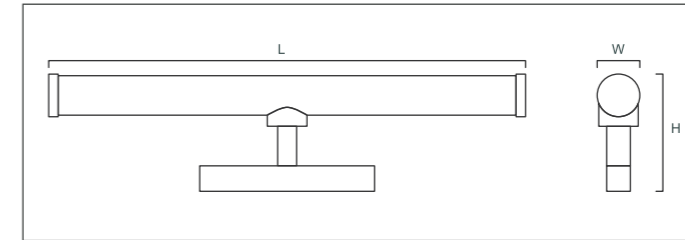



12W


Silicon Soft Tube



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
M20-FT500	DC48V	10	650/700/750	Ø22*L500	10
M20-FT1000	DC48V	20	1300/1400/1500	Ø22*L500	10

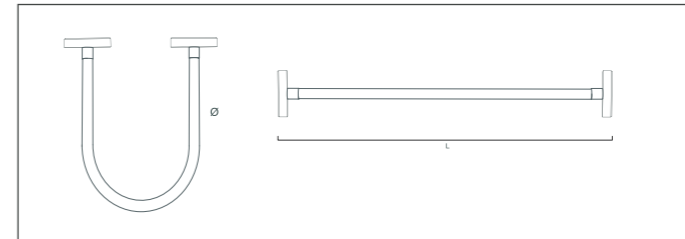

10W

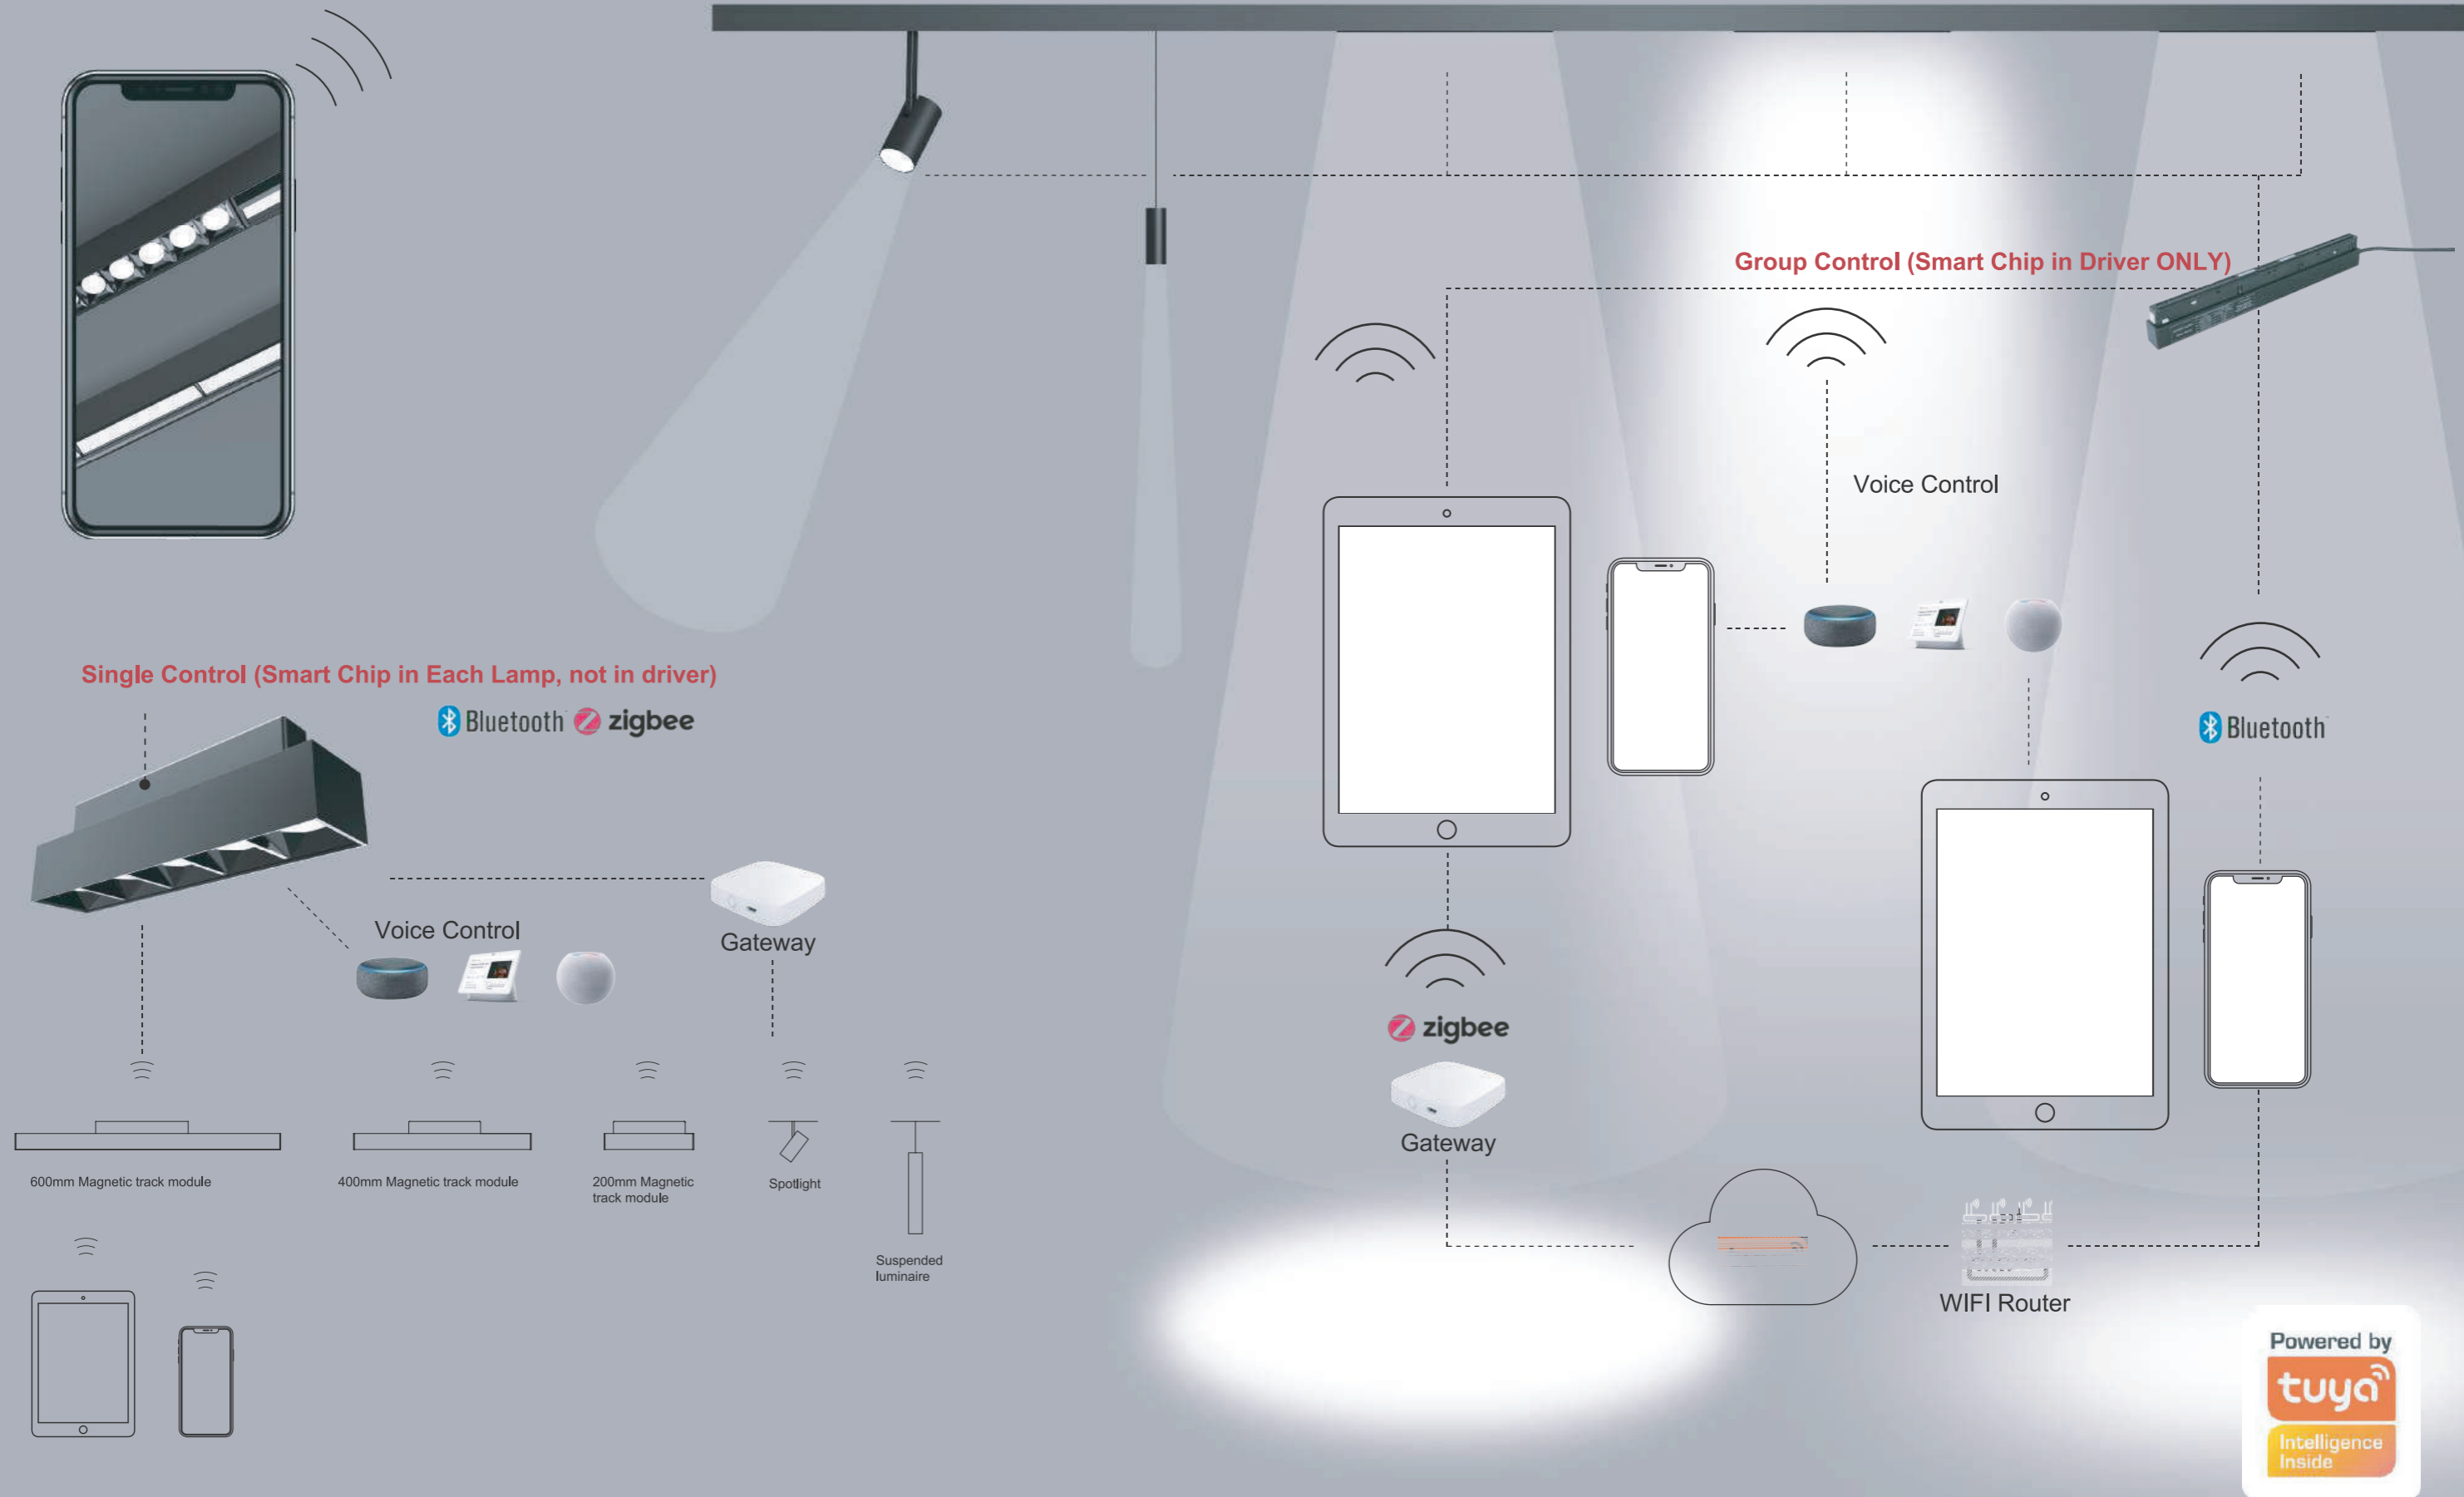




LED TRI-PROOF LIGHT


TRIPRO SERIES LED Tri-Proof Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Packing QTY (pcs/CTN)
TRIPRO-0.6M-20W	AC185-265V	20	2100/2200/2300	120°	L600*W80*H72	15
TRIPRO-1.2M-40W	AC185-265V	40	4200/4400/4600	120°	L1200*W80*H72	9
TRIPRO-1.5M-50W	AC185-265V	50	5250/5500/5750	120°	L1500*W80*H72	9
TRIPRO-1.8M-60W	AC185-265V	60	6300/6600/6900	120°	L1800*W80*H72	6



20W

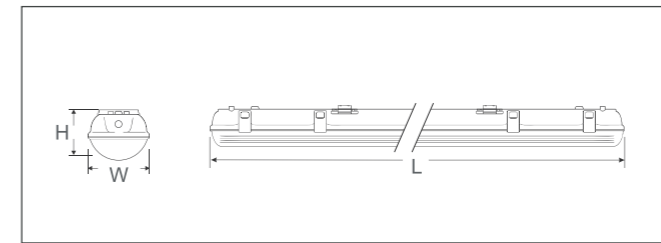




LED UFO HIGHBAY LIGHT

PURA SERIES LED High Bay Light

200LM/W

3 CCT DIP
3 POWER DIP







Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Packing QTY (pcs/CTN)
PURA-100W-A	AC120-277V	100	17000/20000/18000	90°	Ø262*H168	1
PURA-150W-A	AC120-277V	150	25500/30000/27000	90°	Ø301*H168	1
PURA-200W-A	AC120-277V	200	34000/40000/36000	90°	Ø350*H168	1
PURA-240W-A	AC120-277V	240	40800/48000/43200	90°	Ø350*H168	1
PURA-300W-A	AC120-277V	300	51000/60000/54000	90°	Ø400*H168	1



ZHAGA Interface



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Packing QTY (pcs/CTN)
PURA-100W-B	AC120-277V	100	17000/20000/18000	90°	Ø262*H168	1
PURA-150W-B	AC120-277V	150	25500/30000/27000	90°	Ø301*H168	1
PURA-200W-B	AC120-277V	200	34000/40000/36000	90°	Ø350*H168	1
PURA-240W-B	AC120-277V	240	40800/48000/43200	90°	Ø350*H168	1

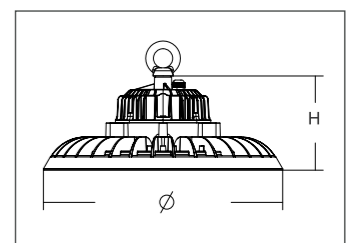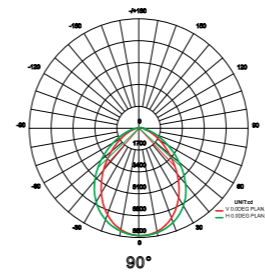


DIAMOND SERIES 3CCT & 3Power DIP UFO



- CRI≥70
- SMD
- 50000H
- 0-10V Dimmable
- Aluminum Material
- 5 YEAR WARRANTY

ZHAGA Interface

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Packing QTY (pcs/CTN)
DIAMOND-100W	AC120-277V	100	19000/19500/20000	60°/90°/120°	Ø262*H168	1
DIAMOND-150W	AC120-277V	150	28500/29250/30000	60°/90°/120°	Ø301*H168	1
DIAMOND-200W	AC120-277V	200	38000/39000/40000	60°/90°/120°	Ø350*H168	1
DIAMOND-240W	AC120-277V	240	45600/46800/48000	60°/90°/120°	Ø350*H168	1

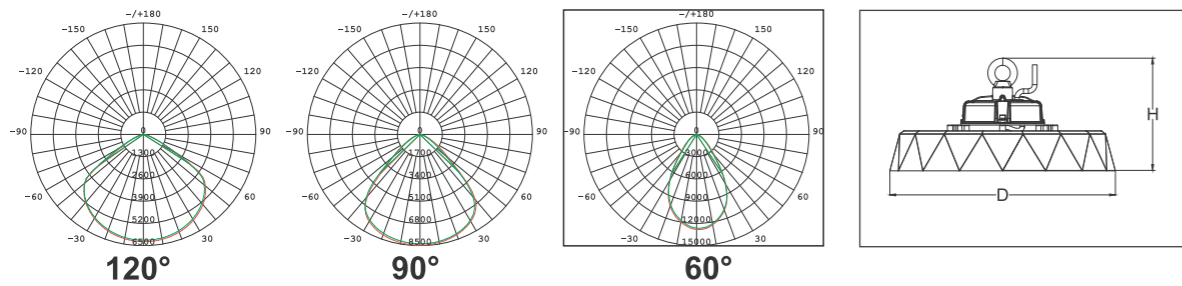


GALAXY SERIES Philips LED Highbay Light



- CRI≥80
- SMD
- 50000H
- Non Dimmable
- Aluminum Material
- 5 YEAR WARRANTY

Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Packing QTY (pcs/CTN)
GALAXY-100W	AC100-277V	100	17500/18000/18500	120°	Ø301*H120	1
GALAXY-150W	AC100-277V	150	26250/27000/27750	120°	Ø352*H120	1
GALAXY-200W	AC100-277V	200	35000/36000/37000	120°	Ø383*H120	1
GALAXY-240W	AC100-277V	240	42000/43200/44400	120°	Ø447*H125	1
GALAXY-300W	AC100-277V	300	52500/54000/55500	120°	Ø447*H125	1

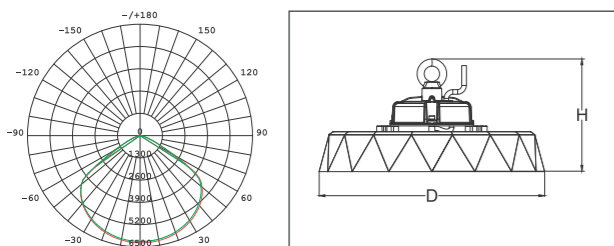

HB01 Series

Power: 100 / 150 / 200 / 300W
Luminous Efficiency: 100lm/W @70Ra
Beam Angle: 90°
Driver: EMC DOB
Color Temp.: 3000K / 4000K / 5000K / 6000K

HB02 Series

Power: 100 / 150 / 200 / 300W
Luminous Efficiency: 110lm/W @70Ra
Beam Angle: 90°
Driver: ZH Power / Normal / DOB
Color Temp.: 3000K / 4000K / 6500K / 3CCT

HB03 Series

Power: 50 / 100 / 150 / 200 / 300W
Luminous Efficiency: 100lm/W @70Ra
Beam Angle: 90°
Driver: DOB
Color Temp.: 4000K / 5000K / 6000K

HB04 Series

Power: 100 / 150 / 200 / 300 / 400 / 500W
Luminous Efficiency: 100lm/W @70Ra
Beam Angle: 90°
Driver: DOB
Color Temp.: 3000K / 4000K / 5000K / 6000K

HB05 Series

Power: 100 / 150 / 200W
Luminous Efficiency: 110lm/W @70Ra
Beam Angle: 90°
Driver: ZH Power / Normal / DOB
Color Temp.: 3000K / 4000K / 6500K / 3CCT

HB06 Series

Power: 100 / 150 / 200 / 300W
Luminous Efficiency: 110lm/W @70Ra
Beam Angle: 90°
Driver: ZH Power / Normal / DOB
Color Temp.: 3000K / 4000K / 6500K / 3CCT

HB07 Series

Power: 100 / 150 / 200 / 300 / 400 / 500 / 600W
Luminous Efficiency: 100lm/W @70Ra
Beam Angle: 90°
Driver: ZH Power / Normal / DOB
Color Temp.: 3000K / 4000K / 6500K / 3CCT

HB08 Series

Power: 100 / 150 / 200 / 250W
Luminous Efficiency: 80lm/W @70Ra
Beam Angle: 90°
Driver: ZH Power / Normal
Color Temp.: 3000K / 4000K / 5000K / 6000K

HB09 Series

Power: 100 / 150 / 200W
Luminous Efficiency: 80lm/W @70Ra
Beam Angle: 90°
Driver: ZH Power / Normal
Color Temp.: 3000K / 4000K / 5000K / 6000K

HB10 Series

Power: 100 / 150 / 200 / 300W
Luminous Efficiency: 80lm/W @70Ra
Beam Angle: 90°
Driver: ZH Power / Normal
Color Temp.: 3000K / 4000K / 5000K / 6000K

HB11 Series

Power: 100 / 150 / 200 / 300W
Luminous Efficiency: 80lm/W @70Ra
Beam Angle: 90°
Driver: ZH Power / Normal
Color Temp.: 3000K / 4000K / 5000K / 6000K




LED FLOOD LIGHT


UNI SERIES LED Flood Light




Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
UNI-10W	AC100-265V	10	70/80/90	100*82*28	60
UNI-20W	AC100-265V	20	140/160/180	125*102*28	48
UNI-30W	AC100-265V	30	240/270/300	160*128*28	40
UNI-50W	AC100-265V	50	400/450/500	185*150*28	28
UNI-70W	AC100-265V	70	490/560/700	238*180*28	20
UNI-100W	AC100-265V	100	800/900/1000	283*210*32	16
UNI-150W	AC100-265V	150	12000/13500/15000	335*250*32	10
UNI-200W	AC100-265V	200	16000/18000/20000	400*290*32	8
UNI-300W	AC100-265V	300	24000/27000/30000	505*340*40	5




30W

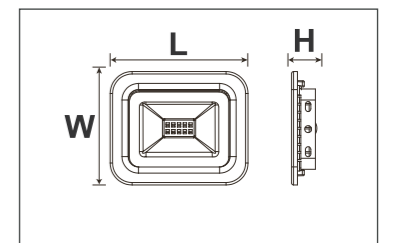


ENKI SERIES LED Flood Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
ENKI-10W	AC90-440V	10	70/80/90	110*90*24	60
ENKI-20W	AC90-440V	20	140/160/180	123*94*24	40
ENKI-30W	AC90-440V	30	240/270/300	162*123*25	30
ENKI-50W	AC90-440V	50	400/450/500	218*160*25	30
ENKI-100W	AC90-440V	100	490/560/700	285*205*26	20
ENKI-150W	AC90-440V	150	800/900/1000	350*250*26	20
ENKI-200W	AC90-440V	200	12000/13500/15000	390*280*26	10
ENKI-300W	AC90-440V	300	16000/18000/20000	430*320*28	5
ENKI-400W	AC90-440V	400	24000/27000/30000	470*360*28	5



30W

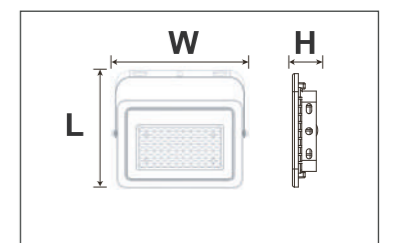

Flood Light More Options

FL01 Series



Power: 10/20/30/50/100/150/200/300/400/500W
 Beam Angle: 120°
 Color Temp.: 3000K / 4000K / 6500K
 LED Source: SMD / COB
 Control Gear: N/A

FL02 Series




Power: 20/30/50/100/150/200W
 Beam Angle: 120°
 Color Temp.: 3000K / 4000K / 6500K
 LED Source: SMD2835 / COB
 Control Gear: N/A

FL03 Series



Power: 30/50/100/200/300/400/500W
 Beam Angle: 120°
 Color Temp.: 3000K / 4000K / 6500K
 LED Source: SMD2835
 Control Gear: N/A

FL04 Series

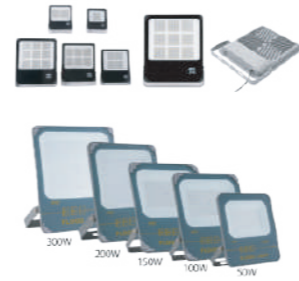

Power: 50/100/150/200/300/400W
 Beam Angle: 120°
 Color Temp.: 3000K / 4000K / 6500K
 LED Source: SMD2835
 Control Gear: N/A

FL05 Series



Power: 10/20/30/50/100/150/200/300/400W
 Beam Angle: 120°
 Color Temp.: 3000K / 4000K / 6500K
 LED Source: SMD2835 / COB
 Control Gear: N/A

FL06 Series



Power: 20/30/50/100/200/300/400/600W
 Beam Angle: 120°
 Color Temp.: 3000K / 4000K / 6500K
 LED Source: SMD2835
 Control Gear: N/A

FL07 Series



Power: 30/50/100/150/200/300/400/500/600W
 Beam Angle: 120°
 Color Temp.: 3000K / 4000K / 6500K
 LED Source: SMD2835
 Control Gear: N/A

FL08 Series



Power: 30/50/100/150/200W
 Beam Angle: 90°
 Color Temp.: 3000K / 4000K / 6500K
 LED Source: SMD2835 / COB
 Control Gear: N/A

FL08 RGB Series



Power: 30/50/100W
 Beam Angle: 90°
 Color Temp.: RGB
 LED Source: SMD2835
 Control Gear: Remote Controller

FL09 Series



Power: 10/20/30/50/100/150/200/300/400/500/600W
 Beam Angle: 120°
 Color Temp.: 3000K / 4000K / 6500K
 LED Source: SMD2835
 Control Gear: N/A

FL10 Series



Power: 10/20/30/50/100/150/200/300/400W
 Beam Angle: 120°
 Color Temp.: 3000K / 4000K / 6500K
 LED Source: SMD2835
 Control Gear: PIR

FL11 Series



Power: 50/120/150/200W
 Beam Angle: 120°
 Color Temp.: 3000K / 4000K / 6500K
 LED Source: SMD2835
 Control Gear: N/A





LED STREET LIGHT

SK SERIES LED Street Light





Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Packing QTY (pcs/CTN)
SK-30W	AC100-277V	30	4500/4800/5100	70X140°	615*240*150	1
SK-60W	AC100-277V	60	9000/9600/10200	70X140°	615*240*150	1
SK-80W	AC100-277V	80	12000/12800/13600	70X140°	625*290*150	1
SK-120W	AC100-277V	120	18000/19200/20400	70X140°	625*290*150	1
SK-150W	AC100-277V	150	22500/24000/25500	70X140°	730*290*150	1
SK-180W	AC100-277V	180	27000/28800/30600	70X140°	730*290*150	1
SK-200W	AC100-277V	200	30000/32000/34000	70X140°	735*335*150	1
SK-250W	AC100-277V	250	37500/40000/42500	70X140°	735*335*150	1
SK-300W	AC100-277V	300	45000/48000/51000	70X140°	815*365*150	1
SK-320W	AC100-277V	320	48000/51200/54400	70X140°	815*365*150	1

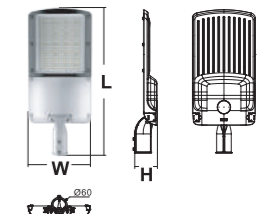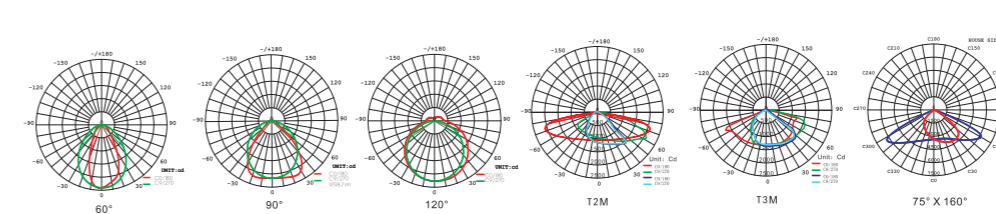


SQ SERIES LED Street Light





Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Packing QTY (pcs/CTN)
SQ-30W	AC100-277V	30	4500/4800/5100	70X140°	512*176*98.5	1
SQ-50W	AC100-277V	50	7500/8000/8500	70X140°	560*196*98.5	1
SQ-100W	AC100-277V	100	15000/16000/17000	70X140°	610*245*98.5	1
SQ-150W	AC100-277V	150	22500/24000/25500	70X140°	661*245*98.5	1
SQ-200W	AC100-277V	200	30000/32000/34000	70X140°	712*300*98.5	1
SQ-300W	AC100-277V	300	45000/48000/51000	70X140°	715*340*98.5	1

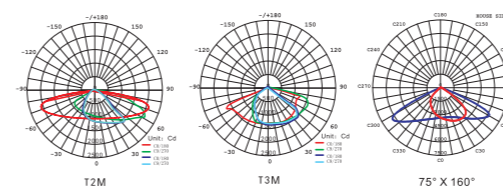

SJ SERIES LED Street Light




Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Packing QTY (pcs/CTN)
SJ-50W	AC100-277V	50	7000/7500/8000	70X140°	472*178*65	1
SJ-80W	AC100-277V	80	11200/12000/12800	70X140°	545*200*65	1
SJ-100W	AC100-277V	100	14000/15000/16000	70X140°	573*240*65	1
SJ-150W	AC100-277V	150	21000/22500/24000	70X140°	642*258*65	1
SJ-200W	AC100-277V	200	28000/30000/32000	70X140°	657*298*65	1

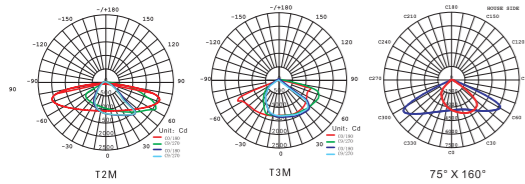

SD SERIES LED Street Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Beam Angle	Size (mm)	Packing QTY (pcs/CTN)
SD-100W	AC100-277V	100	13500/14000/14500	70x140°	L430*W300*H145	1
SD-150W	AC100-277V	150	20250/21000/21750	70x140°	L430*W300*H145	1
SD-200W	AC100-277V	200	27000/28000/29000	70x140°	L522*W300*H145	1
SD-240W	AC100-277V	240	32400/33600/34800	70x140°	L522*W300*H145	1
SD-300W	AC100-277V	300	40500/42000/43500	70x140°	L690*W300*H145	1
SD-400W	AC100-277V	400	54000/56000/58000	70x140°	L690*W300*H145	1



100W

Street Light More Options



SL01 Series
Power: 50 / 100 / 120 / 150 / 180 / 200W
Beam Angle: 75° x 160°
Color Temp.: 3000K / 4000K / 5700K / 6500K
Control Gear: 0-10V / DALI / Light / Motion Sensor

SL02 Series
Power: 20/30/50/60/100/120/150/180/200/250W
Beam Angle: 75° x 160°
Color Temp.: 3000K / 4000K / 5700K / 6500K
Control Gear: 0-10V / DALI / Light / Motion Sensor

SL03 Series
Power: 30/50/60/100/120/150/200/250W
Beam Angle: 70° x 140°
Color Temp.: 3000K / 4000K / 5700K / 6500K
Control Gear: 0-10V / DALI / Light / Motion Sensor

SL04 Series
Power: 30/50/50/100/150/200/250W
Beam Angle: 70° x 140°
Color Temp.: 3000K / 4000K / 5700K / 6500K
Control Gear: 0-10V / DALI / Light / Motion Sensor



SL05 Series
Power: 50/60/100/120/150/180/200/240W
Beam Angle: 70° x 140°
Color Temp.: 3000K / 4000K / 5700K / 6500K
Control Gear: 0-10V / DALI / Light / Motion Sensor

SL06 Series
Power: 50 / 100 / 150 / 200W
Beam Angle: 75° x 140°
Color Temp.: 3000K / 4000K / 5700K / 6500K
Control Gear: 0-10V / DALI / Light / Motion Sensor

SL07 Series
Power: 50 / 100 / 150 / 200W
Beam Angle: 75° x 140°
Color Temp.: 3000K / 4000K / 5700K / 6500K
Control Gear: 0-10V / DALI / Light / Motion Sensor

SL08 Series
Power: 50 / 100 / 150 / 200W
Beam Angle: 75° x 140°
Color Temp.: 3000K / 4000K / 5700K / 6500K
Control Gear: 0-10V / DALI / Light / Motion Sensor



SL09 Series
Power: 50 / 100 / 150 / 200W
Beam Angle: 75° x 140°
Color Temp.: 3000K / 4000K / 5700K / 6500K
Control Gear: 0-10V / DALI / Light / Motion Sensor

SL10 Series
Power: 50 / 100 / 150 / 200 / 250 / 300W
Beam Angle: 70° x 140°
Color Temp.: 3000K / 4000K / 5700K / 6500K
Control Gear: 0-10V / DALI / Light / Motion Sensor

SL11 Series
Power: 50 / 100 / 150W
Beam Angle: 70° x 140°
Color Temp.: 3000K / 4000K / 5700K / 6500K
Control Gear: 0-10V / DALI / Light / Motion Sensor

SL12 Series
Power: 50 / 100 / 150 / 200W
Beam Angle: 75° x 140°
Color Temp.: 3000K / 4000K / 5700K / 6500K
Control Gear: 0-10V / DALI / Light / Motion Sensor



SL13 Series
Power: 50 / 100 / 150 / 200W
Beam Angle: 75° x 140°
Color Temp.: 3000K / 4000K / 5700K / 6500K
Control Gear: 0-10V / DALI / Light / Motion Sensor

SL14 Series
Power: 50 / 100 / 150 / 200W
Beam Angle: 75° x 140°
Color Temp.: 3000K / 4000K / 5700K / 6500K
Control Gear: 0-10V / DALI / Light / Motion Sensor





LED SOLAR LIGHT

MEGA SERIES LED Solar Street Light




Code	Power (W)	Lumen(lm) 6500/7000K	Beam Angle	LiFePO4 Battery (AH)	Size (mm)	Solar Panel	Packing QTY (pcs/CTN)
MEGA-40W	16W	2880	70X140°	3.2V x 40AH	697*361*209	18V 40W 674*336mm	1
MEGA-60W	22W	3960	70X140°	3.2V x 50AH	846*361*209	18V 50W 820*336mm	1
MEGA-80W	30W	5400	70X140°	3.2V x 60AH	1096x361x209	18V 65W 1070x336mm	1

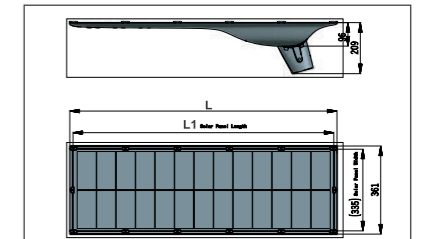


KING SERIES LED Solar Street Light




Code	Power (W)	Lumen(lm) 6500/7000K	Beam Angle	LiFePO4 Battery (AH)	Size (mm)	Solar Panel	Packing QTY (pcs/CTN)
KING-30W	3.5W	350	70X140°	3.2V x 4.5AH	390*194*58	6W/6V 301*187mm	1
KING-60W	5W	500	70X140°	3.2V x 5.5AH	485*218*58	8W/6V 397*211mm	1
KING-90W	10.5W	1050	70X140°	3.2V x 9AH	624*230*58	12W/6V 507*231mm	1
KING-120W	12.5W	1250	70X140°	3.2V x 12AH	725*240*58	15W/6V 608*231mm	1
KING-150W	16W	1600	70X140°	3.2V x 15AH	822*240*58	18W/6V 708*231mm	1




ROOK SERIES LED Solar Street Light




Code	Power (W)	Lumen(lm) 6500/7000K	Beam Angle	LiFePO4 Battery (AH)	Size (mm)	Solar Panel	Packing QTY (pcs/CTN)
ROOK-60W	3.5W	350	70X140°	3.2V x 5AH	380*210*50	6W/5V 301*175mm	1
ROOK-90W	5W	500	70X140°	3.2V x 6AH	460*210*50	8W/5V 397*212mm	1
ROOK-120W	10.5W	1050	70X140°	3.2V x 9AH	530*210*50	12W/5V 455*175mm	1
ROOK-150W	12.5W	1250	70X140°	3.2V x 12AH	630*210*50	15W/5V 527*175mm	1
ROOK-180W	16W	1600	70X140°	3.2V x 15AH	700*210*50	18W/5V 610*175mm	1



GEM SERIES LED Solar Flood Light



Code	Power (W)	Lumen(lm) 6500/7000K	Beam Angle	LiFePO4 Battery (AH)	Size (mm)	Solar Panel	Packing QTY (pcs/CTN)
GEM-50W	3W	540	90°	3.2V x 5AH	180*168*40	5V 6W 270*180mm	1
GEM-100W	6W	1080	90°	3.2V x 10AH	210*195*40	5V 12W 350*290mm	1
GEM-200W	9W	1620	90°	3.2V x 18AH	233*223*40	5V 20W 400*350mm	1
GEM-300W	12W	2160	90°	3.2V x 24AH	273*246*40	5V 25W 390*375mm	1







LED SPORTS STADIUM LIGHT

WRAITH SERIES LED Sport Stadium Light





Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
WRAITH-250W	AC100-277V	250	37500/42500/40000	223*472*201	1
WRAITH-500W	AC100-277V	500	75000/85000/80000	439*472*206	1
WRAITH-750W	AC100-277V	750	112500/127500/120000	624*472*209	1
WRAITH-1000W	AC100-277V	1000	150000/170000/160000	809*472*215	1
WRAITH-1250W	AC100-277V	1250	187500/212500/200000	994*472*215	1
WRAITH-1500W	AC100-277V	1500	225000/255000/240000	865*692*189	1
WRAITH-2000W	AC100-277V	2000	300000/340000/320000	865*882*189	1
WRAITH-2500W	AC100-277V	2500	375000/425000/400000	865*1072*189	1

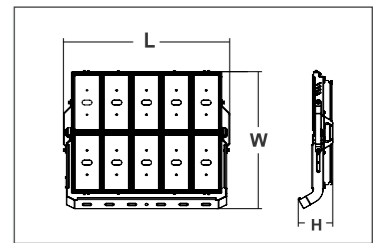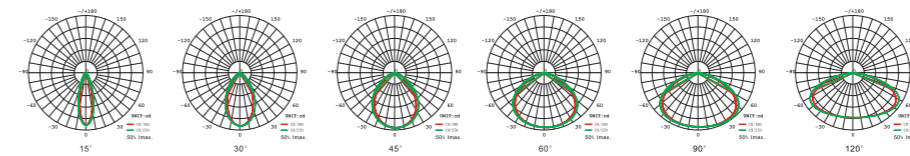

CULLINAN SERIES LED Sport Stadium Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
CULLINAN-300W	AC100-277V	300	37500/42500/40000	223*472*201	1
CULLINAN-600W	AC100-277V	600	75000/85000/80000	439*472*206	1
CULLINAN-900W	AC100-277V	900	112500/127500/120000	624*472*209	1
CULLINAN-1200W	AC100-277V	1200	150000/170000/160000	809*472*215	1
CULLINAN-1500W	AC100-277V	1500	187500/212500/200000	994*472*215	1
CULLINAN-1800W	AC100-277V	1800	225000/255000/240000	865*692*189	1

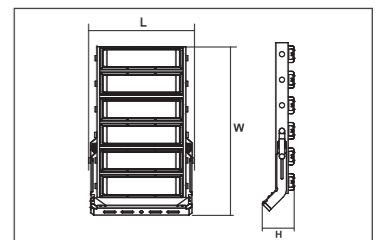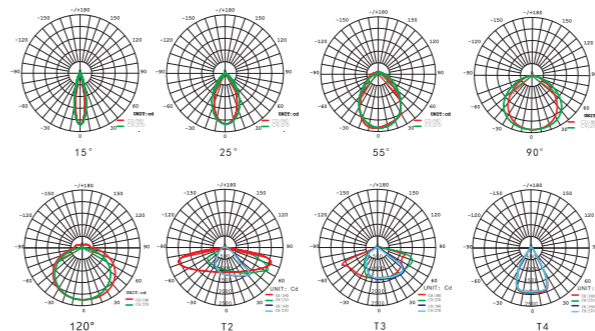

PHANTOM SERIES LED Sport Stadium Light



Code	Voltage	Power (W)	Lumen(lm) 3000/4000/6500K	Size (mm)	Packing QTY (pcs/CTN)
PHANTOM-500W	AC100-277V	500	75000/85000/80000	438*434*356	1
PHANTOM-600W	AC100-277V	600	90000/102000/96000	592*509*423	1
PHANTOM-1200W	AC100-277V	1200	180000/204000/192000	697*649*520	1
PHANTOM-1800W	AC100-277V	1800	270000/306000/288000	831*772*570	1

