



**ASIMO LIGHTING CO., LTD**

Factory Add: No.156 Chang'an Road, Henglan Town, Zhongshan City,  
Guangdong Province, China

WhatsApp / Mobile: 86-19535107398

WeChat: 86-13055928182

Email: Jack@asolite.com

— **www.asolite.com** —



**LED STEP LIGHT**



LED STEP LIGHT



INFRARED  
BODY INDUCTION


## AS-86

TECHNICAL  
PARAMETER



### Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,  
the lamp lights up and he goes out



Everbright

AS-86C




AS-86G

## AS-86

TECHNICAL  
PARAMETER

surface color  
○ ● ● ●

Power:1.5W  
CCT:3000K-6500K  
Size:86x86x30mm  
Cut Size: 80x80x50mm  
(compatible with 86 standard box)





LED STEP LIGHT



INFRARED  
BODY INDUCTION

## AS-N86

TECHNICAL  
PARAMETER

## Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

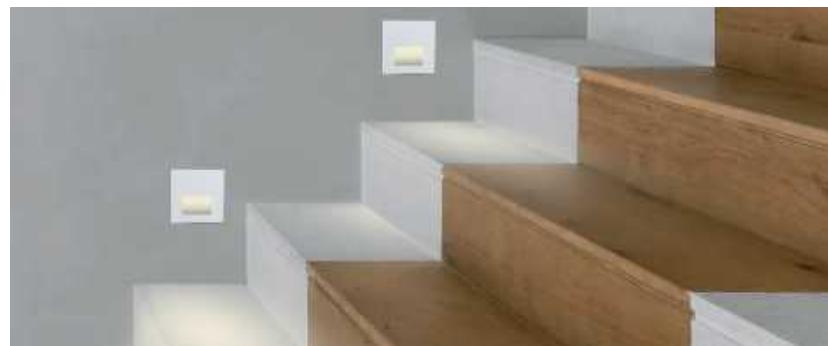
When a man comes,  
the lamp lights up and he goes outEverbright  
AS-N86C

AS-N86G

## AS-N86

TECHNICAL  
PARAMETERsurface color  

Power:1.5W  
CCT:3000K-6500K  
Size:86×86×30mm  
Cut Size: Ø75×50/80×80×50mm  
(compatible with 86 standard box)

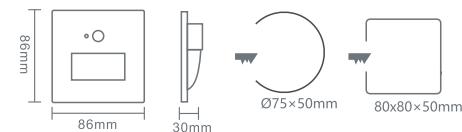



LED STEP LIGHT


INFRARED  
BODY INDUCTION

## AS-95

TECHNICAL  
PARAMETER

## Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

When a man comes,  
the lamp lights up and he goes out

Everbright

AS-95C





AS-95G

## AS-95

TECHNICAL  
PARAMETERsurface color  
○ 

Power:1.5W  
CCT:3000K-6500K  
Size:95×95×30mm  
Cut Size: 80×80mm  
(compatible with 86 standard box)

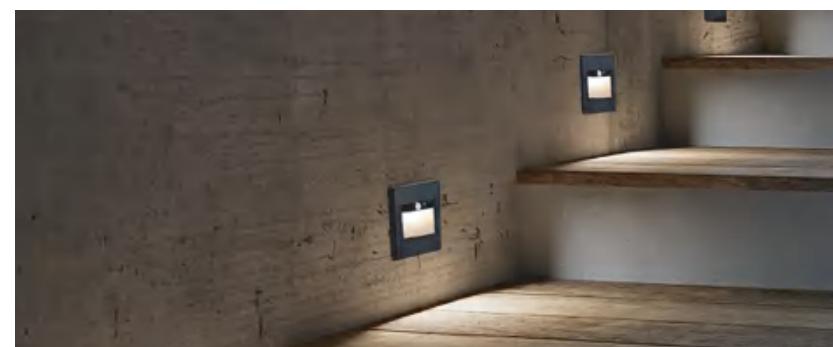



LED STEP LIGHT



INFRARED  
BODY INDUCTION

## AS-P08F

TECHNICAL  
PARAMETER

## Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.


When a man comes,  
the lamp lights up and he goes outEverbright  
AS-A86G

AS-P08FG

## AS-A86/AS-P08F

TECHNICAL  
PARAMETERsurface color  
○ ● ■

Power:1.5W  
CCT:3000K-6500K  
Size:86×86×30mm  
Cut Size: 80×80×50mm  
(compatible with 86 standard box)





LED STEP LIGHT


INFRARED  
BODY INDUCTION

## AS-P08

TECHNICAL  
PARAMETER

## Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,  
the lamp lights up and he goes outEverbright  
AS-P08C

AS-P08G

## AS-P08

TECHNICAL  
PARAMETERsurface color  
○ ● ● ●

Power:1.5W  
CCT:3000K-6500K  
Size:86×86×30mm  
Cut Size: 80×80×50mm  
(compatible with 86 standard box)

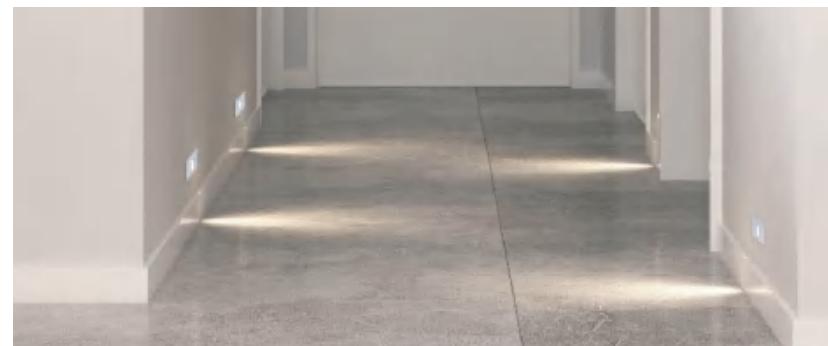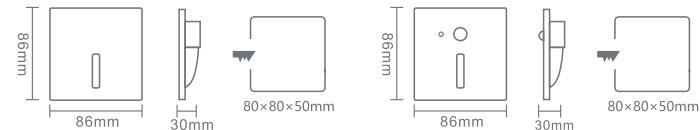




LED STEP LIGHT




INFRARED  
BODY INDUCTION

## AS-AC86

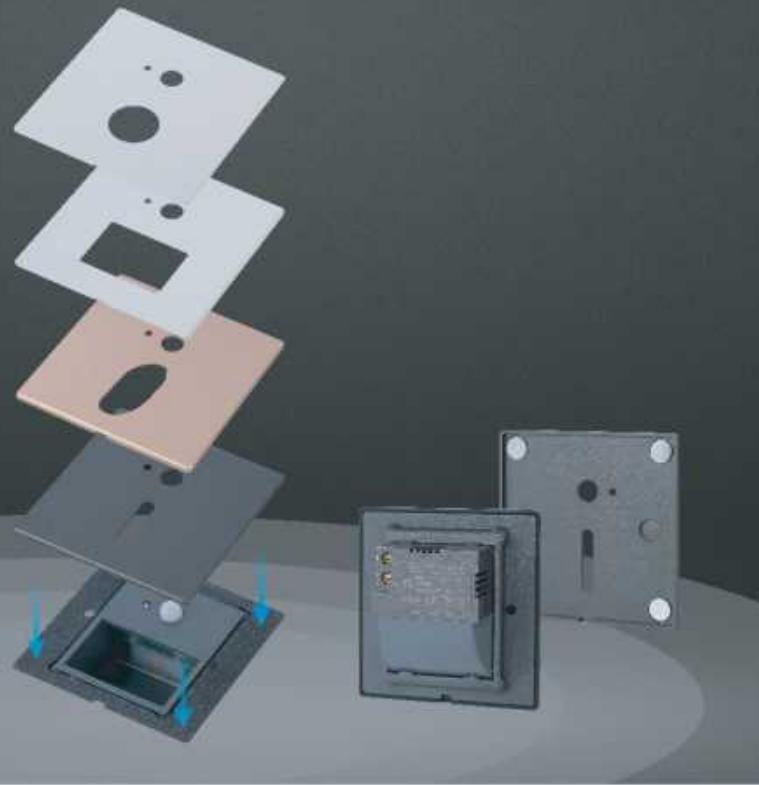TECHNICAL  
PARAMETER

## Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

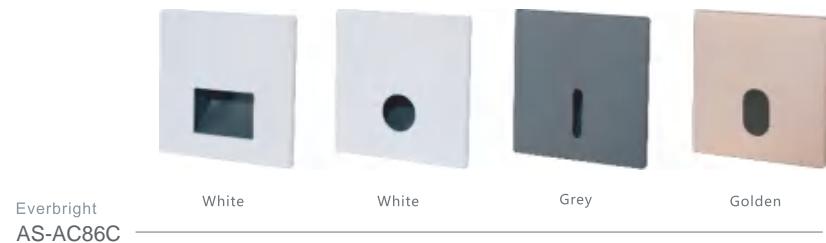When a man comes,  
the lamp lights up and he goes out

## AS-AC86

TECHNICAL  
PARAMETER

surface color




Power:1.5W

CCT:3000K-6500K

Size:86×86×30mm

Cut Size: 80×80×50mm

(compatible with 86 standard box)

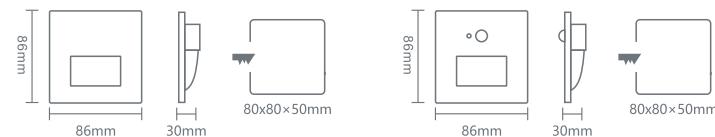



LED STEP LIGHT



INFRARED  
BODY INDUCTION

## AS-LV86

TECHNICAL  
PARAMETER

## Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.


When a man comes,  
the lamp lights up and he goes outEverbright  
AS-LV86C

AS-LV86G

## AS-LV86

TECHNICAL  
PARAMETERsurface color  
○ ● ■ ■

Power:1.5W  
CCT:3000K-6500K  
Size:86×86×30mm  
Cut Size: 80×80×50mm  
(compatible with 86 standard box)

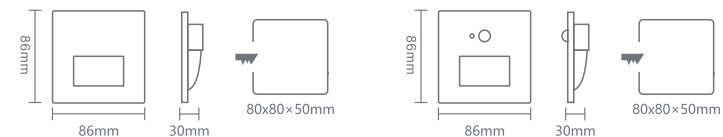



LED STEP LIGHT


INFRARED  
BODY INDUCTION

## AS-C901

TECHNICAL  
PARAMETER

## Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

When a man comes,  
the lamp lights up and he goes outAS-C901  
TECHNICAL  
PARAMETEREverbright  
AS-C901C

Golden



Grey



Black



White

## AS-C901G



Golden



Grey



Black



White



## AS-C901

TECHNICAL  
PARAMETER




Power:3W

CCT:3000K-6500K

Size:90x90x52mm

Cut Size: 80x80x50mm  
(compatible with 86 standard box)

surface color

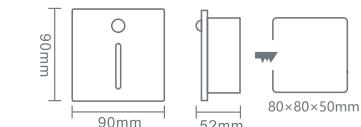

LED STEP LIGHT CCC cec CE ✓ RoHS F



LED STEP LIGHT


INFRARED  
BODY INDUCTION

## AS-W901

TECHNICAL  
PARAMETER

## Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

When a man comes,  
the lamp lights up and he goes outEverbright  
AS-W901FC

AS-W901FG

Everbright  
AS-W901YC

AS-W901YG




## AS-W901

TECHNICAL  
PARAMETERsurface color  
● ● ○

Power:3W

CCT:3000K-6500K

Size:90×90×52mm/Ø87×52mm

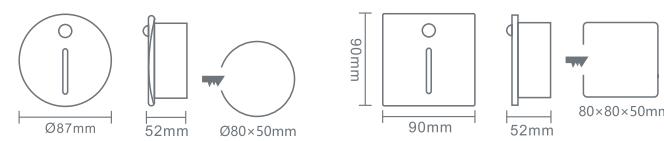Cut Size: 80×80×50mm/Ø80×50mm  
(compatible with 86 standard box)

LED STEP LIGHT CCC cec CE ✓ RoHS F



LED STEP LIGHT



INFRARED  
BODY INDUCTION


## AS-F020

TECHNICAL  
PARAMETER



### Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,  
the lamp lights up and he goes out



Everbright  
AS-F020C



AS-F020G



## AS-F020

TECHNICAL  
PARAMETER

surface color





Power:3W

CCT:3000K-6500K

Size:40×185×44mm

Cut Size: 33×170×41mm



LED STEP LIGHT



LED STEP LIGHT


INFRARED  
BODY INDUCTION

AS-XF020

TECHNICAL  
PARAMETER

## Product characteristics


- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

When a man comes,  
the lamp lights up and he goes outEverbright  
AS-XF020C

AS-XF020G



AS-XF020

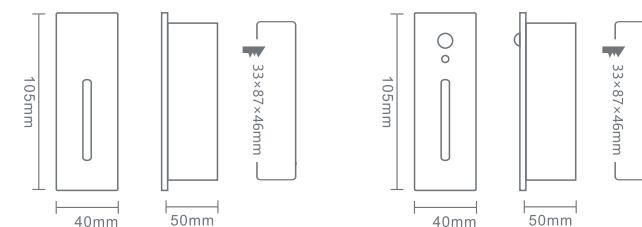TECHNICAL  
PARAMETERsurface color  
○ ● ●Power:1-3W  
CCT:3000K-6500K  
Size:40×105×50mm  
Cut Size:33×87×46mm

LED STEP LIGHT CCC cec CE RoHS GS F



LED STEP LIGHT


INFRARED  
BODY INDUCTION

## AS-W020

TECHNICAL  
PARAMETER

## Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

When a man comes,  
the lamp lights up and he goes outAS-W020  
TECHNICAL  
PARAMETER

## AS-W020G



## AS-W020

TECHNICAL  
PARAMETERsurface color  white  black

Power:3W

CCT:3000K-6500K

Size:100×200×48mm


Cut Size: 40×170×47mm

Power:3W

CCT:3000K-6500K

Size:100×145×48mm

Cut Size: 70×120×47mm

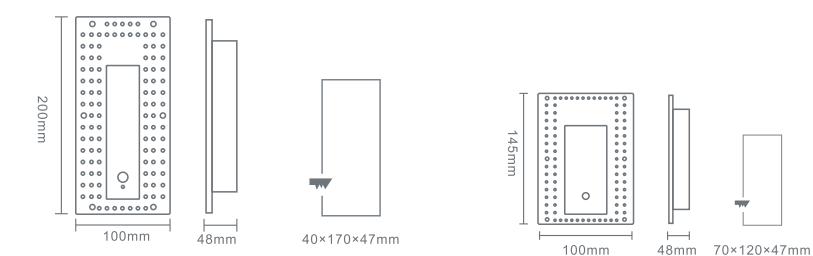



LED STEP LIGHT


INFRARED  
BODY INDUCTION

## AS-H08

TECHNICAL  
PARAMETER

## Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,  
the lamp lights up and he goes out



## AS-H08

TECHNICAL  
PARAMETER


surface color



Power:1.5W

CCT:3000K-6500K

Size:86×86×30mm

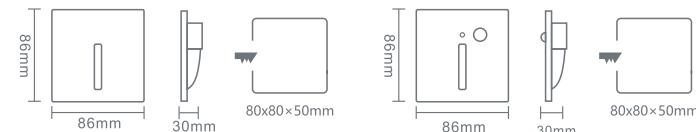
Cut Size: 80×80×50mm  
(compatible with 86 standard box)



LED STEP LIGHT



INFRARED  
BODY INDUCTION

## AS-AL86

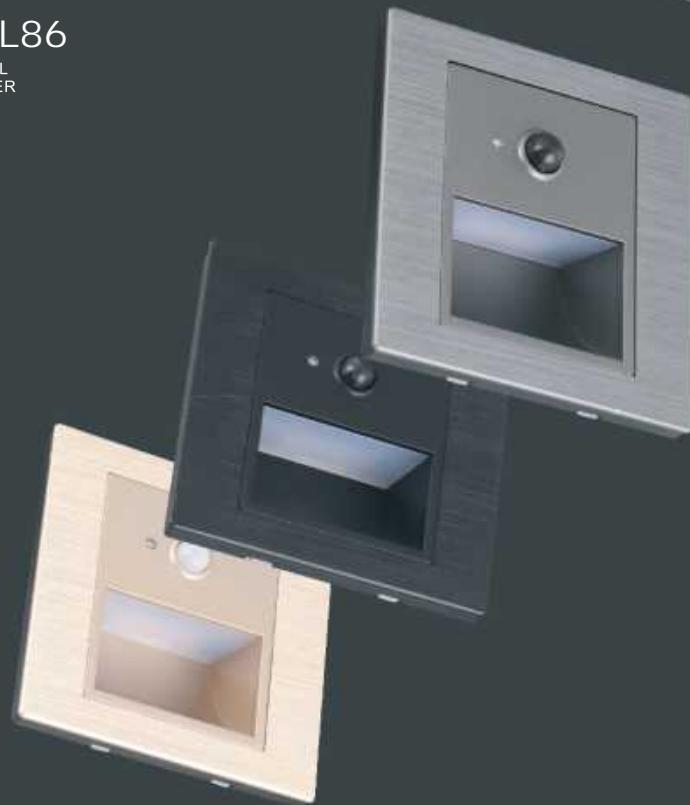TECHNICAL  
PARAMETER

## Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,  
the lamp lights up and he goes outEverbright  
AS-AL86C

AS-AL86G

## AS-AL86

TECHNICAL  
PARAMETERsurface color  
● ● ●

Power:1.5W  
CCT:3000K-6500K  
Size:86×86×30mm  
Cut Size: 80×80×50mm  
(compatible with 86 standard box)





LED STEP LIGHT


INFRARED  
BODY INDUCTION

## AS-T45

TECHNICAL  
PARAMETER

## Product characteristics



- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

When a man comes,  
the lamp lights up and he goes outEverbright  
AS-T45YC

AS-T45YG

Everbright  
AS-T45FC

AS-T45FG

AS-T45  
TECHNICAL  
PARAMETERsurface color  
○ ● ■Power:1W  
CCT:3000K-6500K  
Size:Ø45×60mm  
Cut Size:Ø40×60mmPower:1W  
CCT:3000K-6500K  
Size:45×45×60mm  
Cut Size:Ø40×60mm



LED STEP LIGHT


INFRARED  
BODY INDUCTION

## AS-T65

TECHNICAL  
PARAMETER

## Product characteristics



- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

When a man comes,  
the lamp lights up and he goes outEverbright  
AS-T65YC

AS-T65YG

Everbright  
AS-T65FC

AS-T65FG

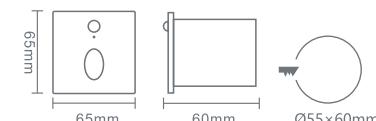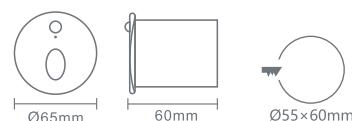AS-T65  
TECHNICAL  
PARAMETERsurface color  
○ ● ■Power:1W  
CCT:3000K-6500K  
Size:65x60mm  
Cut Size:55x60mmPower:1W  
CCT:3000K-6500K  
Size:65x65x60mm  
Cut Size:55x60mm



LED STEP LIGHT



Everbright  
AS-X105C



AS-X105G



### AS-X105

#### TECHNICAL PARAMETER



surface color  
○ ● ■

Power:1-3W

CCT:3000K-6500K

Size:40×105×50mm

Cut Size:34×87×50mm



### AS-W86

#### TECHNICAL PARAMETER

surface color  
○



Power:1W

CCT:3000K-6500K

Size:80×80×45mm

Cut Size: 80×80×50mm

(compatible with 86 standard box)

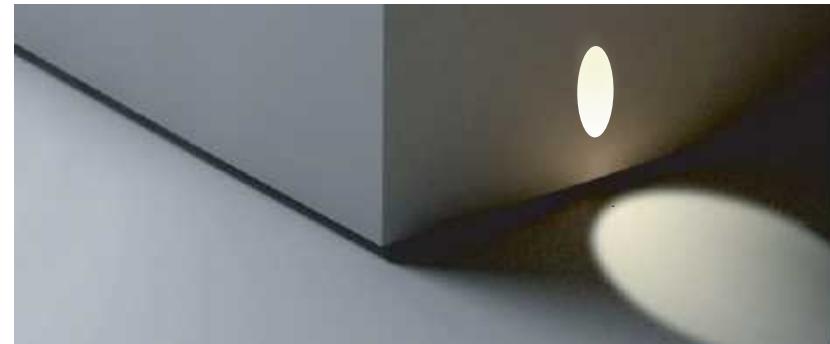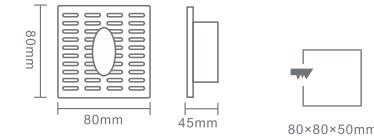



LED STEP LIGHT

## AS-CM706

TECHNICAL  
PARAMETER



### Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.




Steel + PC



## AS-CM706

TECHNICAL  
PARAMETER

Power:1W  
CCT:3000K  
Size:70×60×45mm






LED STEP LIGHT


INFRARED  
BODY INDUCTION

## AS-A86

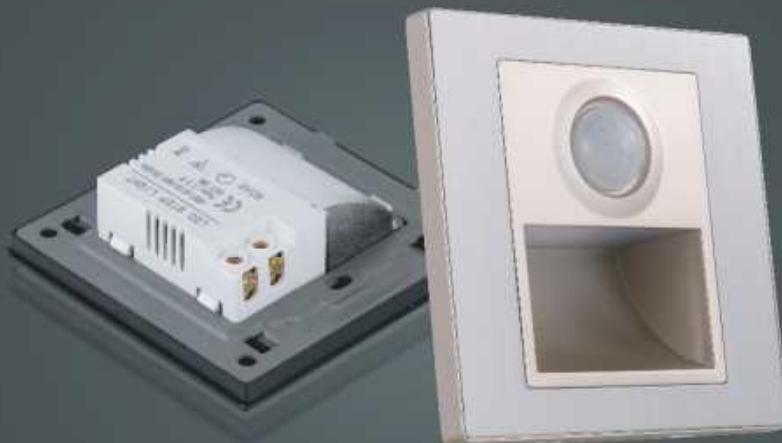TECHNICAL  
PARAMETER

## Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



When a man comes,  
the lamp lights up and he goes outEverbright  
AS-A86C

AS-A86G

## AS-A86

TECHNICAL  
PARAMETERsurface color  
○ ● ■ ■

Power:1.5W  
CCT:3000K-6500K  
Size:86×86×30mm  
Cut Size: 80×80×50mm  
(compatible with 86 standard box)





LED STEP LIGHT

INFRARED  
BODY INDUCTION

## AS-86ANF


TECHNICAL  
PARAMETER

## Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.




Steel + PC

When a man comes,  
the lamp lights up and he goes out

## AS-86ANF

TECHNICAL  
PARAMETER

Power:200W  
CCT:3000K-6500K  
Size:86×86×30mm  
Cut Size: 80×80×50mm  
(compatible with 86 standard box)





LED STEP LIGHT

## AS-F86

TECHNICAL  
PARAMETERINFRARED  
BODY INDUCTION

## Product characteristics



- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



stainless steel



PMMA


When a man comes,  
the lamp lights up and he goes outEverbright  
AS-F86C

AS-F86G

## AS-F86

TECHNICAL  
PARAMETERsurface color  
○ ● ■

Power:1.5W  
CCT:3000K-6500K  
Size:86×86×30mm  
Cut Size: 80×80×50mm  
(compatible with 86 standard box)

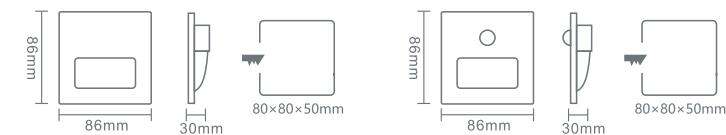



LED STEP LIGHT


INFRARED  
BODY INDUCTION

## AS-T86

TECHNICAL  
PARAMETER

## Product characteristics



- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

When a man comes,  
the lamp lights up and he goes outEverbright  
AS-T86C

AS-T86G



## AS-T86

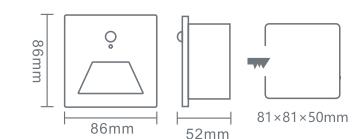TECHNICAL  
PARAMETERsurface color  
○ ● ●Power:3W  
CCT:3000K-6500K  
Size:86x86x52mm  
Cut Size: 81x81x50mm

LED STEP LIGHT CCC cec CE ✓ RoHS F



LED STEP LIGHT

GS-086FY  
TECHNICAL  
PARAMETER



#### Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.



AS-118



AS-118

TECHNICAL  
PARAMETER

surface color  
○ ■ ■ ■


Power:1.5W

CCT:3000K-6500K

Size:118×75×30mm

Cut Size: 108×68×55mm

(compatible with 118-2 standard box)

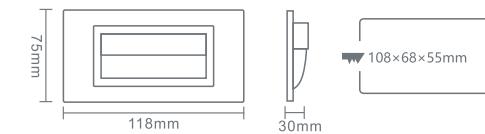



LED STEP LIGHT


INFRARED  
BODY INDUCTION

## AS-004

TECHNICAL  
PARAMETER

## Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

When a man comes,  
the lamp lights up and he goes outEverbright  
AS-004C

AS-004G



## AS-004

TECHNICAL  
PARAMETER



Power:3W

CCT:3000K-6500K

Size:85x85x51mm

Cut Size: 81x81x50mm

surface color

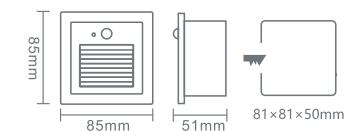

## LED STEP LIGHT





LED STEP LIGHT


## AS-901

TECHNICAL  
PARAMETER



### Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

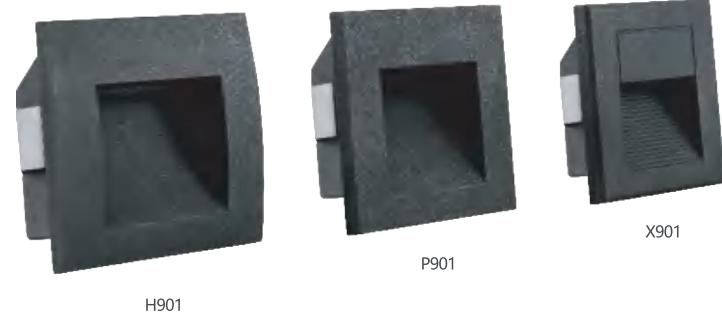

H901

P901

X901




## AS-901

TECHNICAL  
PARAMETER

surface color

Power:3W  
CCT:3000K-6500K  
Size:90x90x57mm  
Cut Size: 81x81x50mm

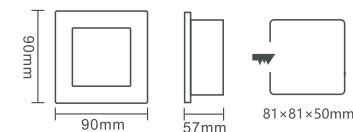



LED STEP LIGHT




IP65

## AS-011Y

TECHNICAL  
PARAMETER

Power:3W  
CCT:3000K-6500K  
Size:Ø68×48mm  
Cut Size:Ø50×45mm




IP65

## AS-011F

TECHNICAL  
PARAMETER


Power:3W  
CCT:3000K-6500K  
Size:68×68×48mm  
Cut Size:Ø50×45mm



## AS-012

TECHNICAL  
PARAMETER


Power:1W  
CCT:3000K-6500K  
Size:Ø80×50mm  
Cut Size: Ø75×60mm



## AS-007

TECHNICAL  
PARAMETER


Power:3W  
CCT:3000K-6500K  
Size:105×60×40mm  
Cut Size: 99×50×50mm



IP65

IP65

Power:3W  
CCT:3000K-6500K  
Size:60×105×40mm  
Cut Size: 50×99×50mm




## AS-019

TECHNICAL  
PARAMETER


IP65

Power:6W  
CCT:3000K-6500K  
Size:210×65×60mm  
Cut Size: 200×55×65mm



IP65

Power:3W  
CCT:3000K-6500K  
Size:65×210×60mm  
Cut Size: 55×200×65mm





LED STEP LIGHT


INFRARED  
BODY INDUCTION

## AS-M901



TECHNICAL  
PARAMETER

## Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

When a man comes,  
the lamp lights up and he goes outEverbright  
AS-M901C

AS-M901G

AS-M901  
TECHNICAL  
PARAMETERPower:3W  
CCT:3000K-6500K  
Size:90×90×28mmsurface color  
○ ● ●

LED STEP LIGHT CCC cec CE ✓ RoHS F




LED STEP LIGHT



AS-116

TECHNICAL  
PARAMETER



Power:3W  
CCT:3000K-6500K  
Size:116\*83\*55mm  
Cut Size:106\*76\*55mm

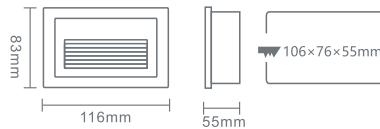

AS-110

TECHNICAL  
PARAMETER


Power:3W  
CCT:3000K-6500K  
Size:110\*110\*60mm  
Cut Size:103\*103\*60mm

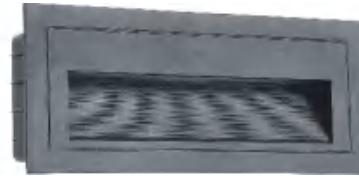

AS-206

TECHNICAL  
PARAMETER


Power:6W  
CCT:3000K-6500K  
Size:206\*86\*50mm  
Cut Size:186\*75\*50mm



AS-160

TECHNICAL  
PARAMETER


Power:6W  
CCT:3000K-6500K  
Size:160\*160\*63mm  
Cut Size:150\*150\*60mm

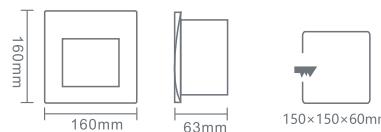


AS-165

TECHNICAL  
PARAMETER

Power:3W  
CCT:3000K-6500K  
Size:105\*165\*60mm  
Cut Size: 100×160×70mm




Power:3W  
CCT:3000K-6500K  
Size:165\*105\*60mm  
Cut Size: 160×100×70mm




AS-081

TECHNICAL  
PARAMETER

Power:3W  
CCT:3000K-6500K  
Size:105\*165\*60mm  
Cut Size: 100×160×70mm



Power:3W  
CCT:3000K-6500K  
Size:165\*105\*60mm  
Cut Size: 160×100×70mm






LED STEP LIGHT




AS-045

Power:3W  
CCT:3000K-6500K  
Size:110\*45\*55mm  
Cut Size:108\*44\*55mm





AS-052

Power:3W  
CCT:3000K-6500K  
Size:137\*52\*55mm  
Cut Size:130\*44\*50mm




AS-070

Power:6W  
CCT:3000K-6500K  
Size:170\*70\*55m  
Cut Size:160\*60\*55mm



AS-014


TECHNICAL  
PARAMETER  
Power:1~3W  
CCT:3000K-6500K  
Size:85\*85\*50mm  
Cut Size: 65x65x50mm




AS-103

TECHNICAL  
PARAMETER


Power:3W  
CCT:3000K-6500K  
Size:103\*58\*55mm  
Cut Size:97\*50\*55mm

AS-075  
TECHNICAL  
PARAMETER


Power:6W  
CCT:3000K-6500K  
Size:256\*75\*55 mm  
Cut Size:248\*70\*55mm

AS-095  
TECHNICAL  
PARAMETER


Power:6W  
CCT:3000K-6500K  
Size: 250\*95\*55mm  
Cut Size: 240\*80\*55mm

AS-014Y  
TECHNICAL  
PARAMETER

Power:3W  
CCT:3000K-6500K  
Size:φ85\*50mm  
Cut Size:φ65\*45mm







AS-M230  
TECHNICAL  
PARAMETER

Power:6W  
CCT:3000K-6500K  
Size:230\*80\*30mm






LED STEP LIGHT

**AS-M105**  
TECHNICAL  
PARAMETERPower:3W  
CCT:3000K-6500K  
Size:105×60×30mm**AS-M105**  
TECHNICAL  
PARAMETERPower:3W  
CCT:3000K-6500K  
Size:175×80×30mm**AS-M210**  
TECHNICAL  
PARAMETERPower:6W  
CCT:3000K-6500K  
Size:210×60×30mm**AS-M225**  
TECHNICAL  
PARAMETERPower:6W  
CCT:3000K-6500K  
Size:225×80×30mm**AS-017Y**TECHNICAL  
PARAMETERPower:3W/6W  
CCT:3000K-6500K  
Size:Ø117×33mm  
Ø200×33mm**AS-017F**TECHNICAL  
PARAMETERPower:3W/6W  
CCT:3000K-6500K  
Size:117×117×33mm  
200×200×33mm**AS-M085Y AS-M117Y**

Power:3W

CCT:3000K-6500K


Size:Ø85×33mm/Ø117×33mm

**AS-M117F**

Power:3W

CCT:3000K-6500K


Size:117×117×33mm

**AS-M200**

Power:6W

CCT:3000K-6500K

Size:200×90×32mm





LED STEP LIGHT




IP65

AS-021

TECHNICAL  
PARAMETER

Power:1W  
CCT:3000K-6500K  
Size:58×58×50mm  
Cut Size: 40×40×50mm




IP65

AS-006

TECHNICAL  
PARAMETER

Power:3W  
CCT:3000K-6500K  
Size:145×70×50mm  
Cut Size: 140×68×60mm




IP65

AS-008

TECHNICAL  
PARAMETER

Power:3W  
CCT:3000K-6500K  
Size:Ø83×50mm  
Cut Size: Ø65×55mm




IP65

AS-013S

TECHNICAL  
PARAMETER

Power:1W  
CCT:3000K-6500K  
Size:65×65×30mm  
Cut Size: Ø45×50mm




IP65

AS-018

TECHNICAL  
PARAMETER

Power:3W  
CCT:3000K-6500K  
Size:115×85×50mm  
Cut Size: 105×75×50mm




IP65

AS-018-2

TECHNICAL  
PARAMETER

Power:6W  
CCT:3000K-6500K  
Size:214×85×50mm  
Cut Size: 204×75×60mm




IP65

AS-005C

TECHNICAL  
PARAMETER

Power:3W  
CCT:3000K-6500K  
Size:85×85×50mm  
Cut Size: 80×80×50mm  
(compatible with 86 standard box)




IP65

AS-005G

TECHNICAL  
PARAMETER

Power:3W  
CCT:3000K-6500K  
Size:85×85×50mm  
Cut Size: 80×80×50mm  
(compatible with 86 standard box)






LED STEP LIGHT



### AS-011

TECHNICAL  
PARAMETER

Power:2W  
CCT:3000K-6500K  
Size:70×70×50mm  
Cut Size: 65×65×50mm



### AS-010

TECHNICAL  
PARAMETER

Power:2W  
CCT:3000K-6500K  
Size:110×45×50mm  
Cut Size:105×40×50mm



Power:4W  
CCT:3000K-6500K  
Size:170×70×50mm  
Cut Size: 155×55×50mm

